

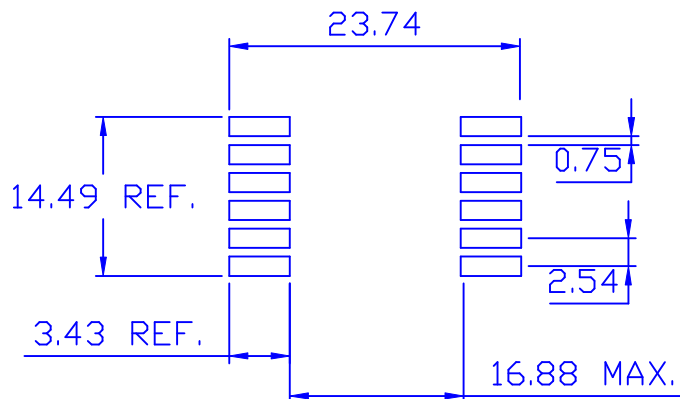
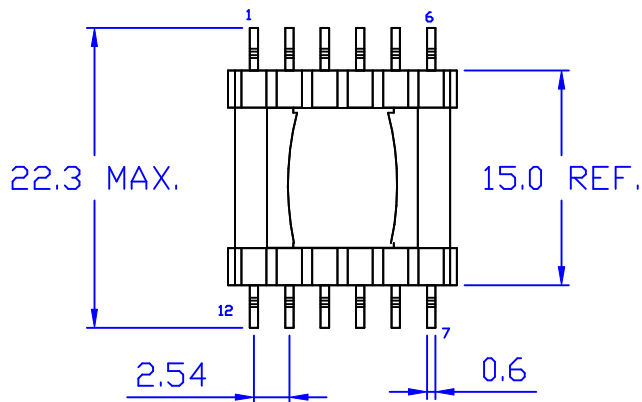


MARKING PIN#1 SIDE

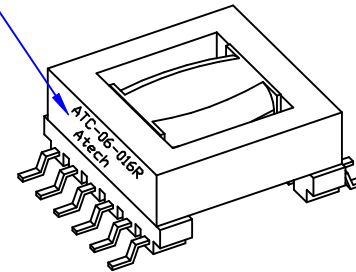

PCB LAYOUT

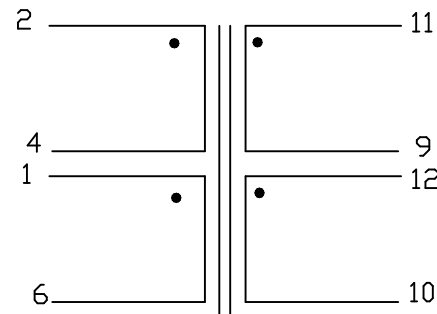

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 2-4 = 200m OHM MAX. 1-6 = 68m OHM MAX.
PIN 11-9 = 10m OHM MAX. 12-10 = 10m OHM MAX.
2. INDUCTANCE(@10 KHZ, 1Vrms) : PIN 2-4 = 97uH±15%
PIN 1-6 = 8.3uH REF.
3. TURN TATIO (@10KHZ,1Vrms) : PIN 2-4 : 11-9 = 10.5±10%
PIN 2-4 : 12-10 = 10.5±10%
4. HI-POT (@1800VAC, 3mA, 1 MIN) : PRI -SEC
PRI- CORE
SEC - CORE

5. RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004		TITLE	
								TRANSFORMER	
								DWG. NO.	
								ATC-06-016R	
	RELEASE	04/07/2006	PAIR	WILL	EUGENE	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						04/07/06		DRAW <i>Pair</i>	