
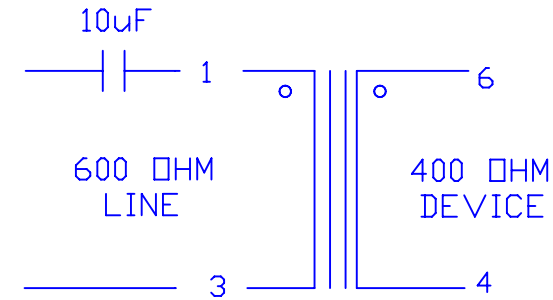


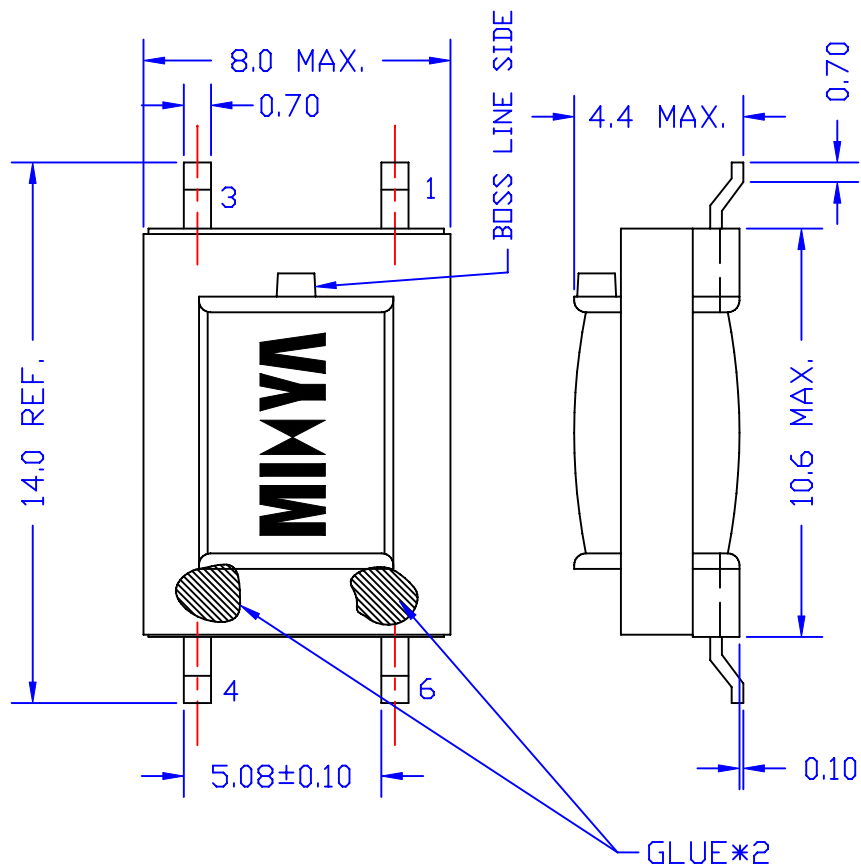

ELECTRICAL CHARACTERISTICS:

1. D.C.R. PIN 1-3 = 105 Ω M +/-10% PIN 4-6 = 105 Ω M +/-10%
2. INDUCTANCE (@ 250HZ, 0.5Vrms, PARALLEL) 1-3 = 3 H MIN.
3. IMPEDANCE (@ 1KHZ, 0dBm, 6-4 W/H 400 Ω M)
1-3 = 600 Ω M +/-3%
4. INSERTION LOSS = 2.3 dB MAX.
(@ 1KHZ, 0dBm, W/H 400 Ω M LOAD)
5. FREQ. RESP. (@ 300HZ TO 4KHZ, REF. 1KHZ) = +/-0.12dB
6. RETURN LOSS: @300HZ = 28dB MIN. @1KHZ = 35dB MIN.
@4KHZ = 35dB MIN.
7. TURN RATIO : 1-3:6-4 = 1 +/-1%
8. HI-POT = 1250 VAC, 1mA, 2SEC. (PRI.-SEC.)
9. RoHS COMPLIANT

					Atech®		TITLE 600: 400 TRANSFORMER	
					Atech Technology Co., Ltd.		DWG. NO. ATC-07-004R	
					TEL:(02)2794-6667 FAX:(02)2794-8004			
A	LOGO	05/09/2007	PAIR	SEN	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	03/20/2007	PAIR	SEN	EUGENE			
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTP30803HA	DRAW Pair
REVISIONS						03/20/07		