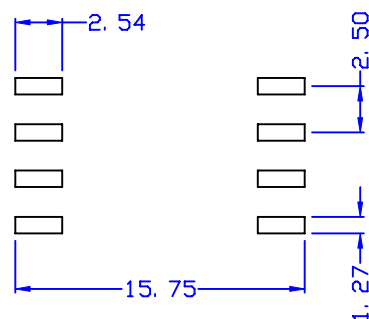
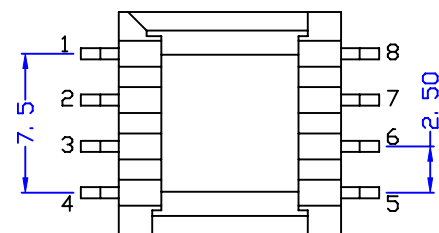
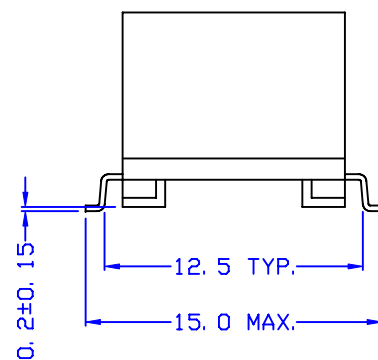
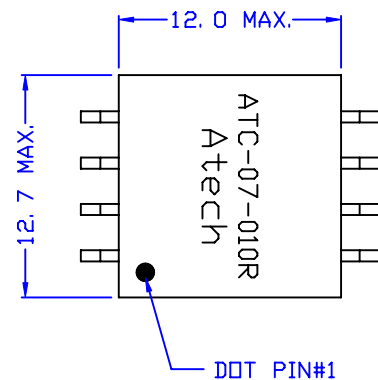


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 3-4 = 570mΩ MAX.
PIN 1-2 = 1000mΩ MAX.
PIN 6-8 = 60mΩ MAX.
PIN 5-7 = 60mΩ MAX.
- INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 3-4 = 155uH ±10%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 3-4 (1-2,5-6-7-8 SHORT) = 5uH MAX.
- TURN RATIO (@800KHZ, 0.1Vrms) : PIN 2-1 : 3-4 = 0.682±3%
PIN 6-8 : 3-4 = 0.273±3%
PIN 5-7 : 3-4 = 0.273±3%
- HI-POT (@500VAC, 1mA, 2SEC) : PIN 3-1, PIN 3-5, PIN 3-8
- RoHS COMPLIANT

						Atech®		TITLE PoE POWER TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.
						TEL:02)2794-6667 FAX:02)2794-8004		ATC-07-010R
RELEASE		05/10/2007	PAIR	MICHAEL	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
NO		DESCRIPTION	DATE	BY	CHK	APPD	P/N:	DRAW
REVISIONS						05/10/07	CTX410002A	Pair