
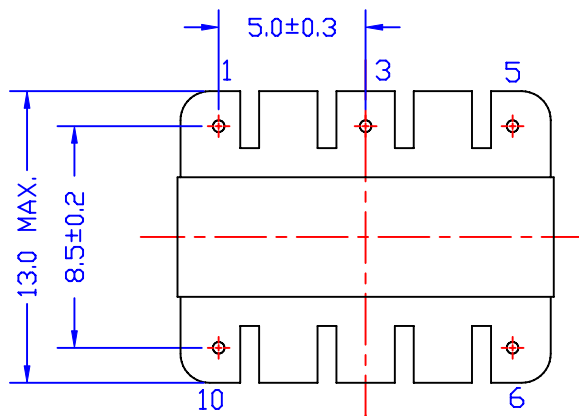
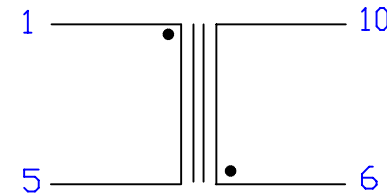


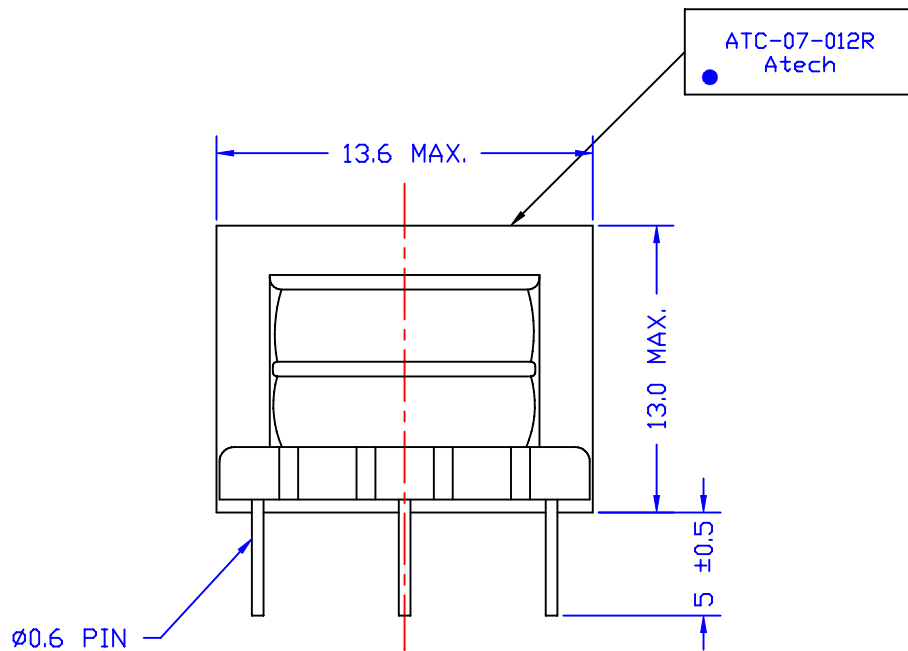

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-5 = 10 OHM MAX., PIN 6-10 = 10 OHM MAX.
- INDUCTANCE
 (@10KHz, 0.1Vrms W/H 100mA) : PIN 1-5= 6mH ± 8%
 PIN 6-10 = 6mH ±8%
 (@100KHz, 0.1Vrms W/H 100mA) : PIN 1-10(5-6 SHORT) = 24mH±5%
- TURN RATIO (@140KHZ, 0.1Vrms) : 1-5 : 6-10 = 1 ± 5%
- HI-POT (@500VAC, 1mA, 2SEC) : 1-10
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE INDUCTOR
								DWG. NO. ATC-07-012R
	RELEASE	06/20 2007	PAIR	MICHAEL	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 06/20/07		DRAW <i>Pair</i>
REVISIONS								