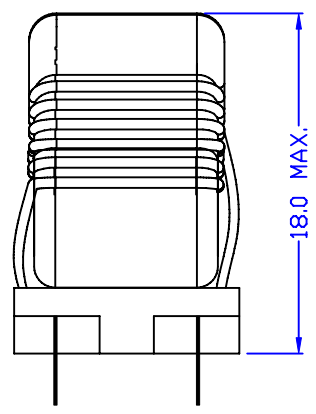
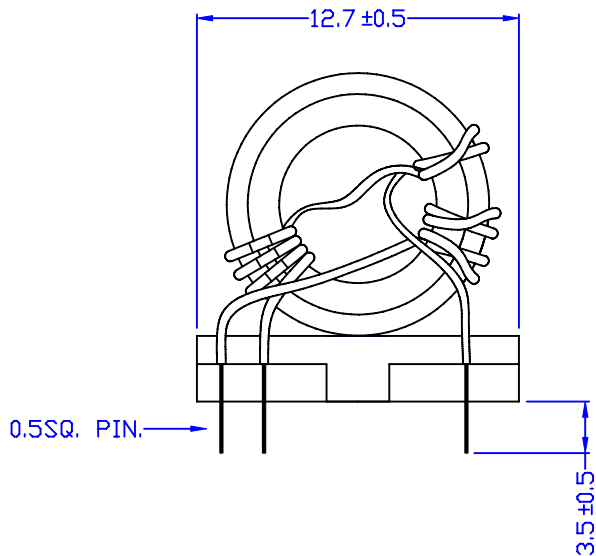


ELECTRICAL CHARACTERISTICS:

1. D.C.R : 1-6 = 20m Ω HM MAX.
2-5 = 20m Ω HM MAX.
3-4 = 20m Ω HM MAX.
2. INDUCTANCE(@1KHZ, 1Vrms) :
1-6 = 10.7uH $\pm 25\%$
2-5 = 10.7uH $\pm 25\%$
3-4 = 10.7uH $\pm 25\%$
3. TURN RATIO(@1MHZ,1Vrms)
1-6 : 2-5 = 1 $\pm 1\%$
1-6 : 3-4 = 1 $\pm 1\%$
4. HI-POT(@500VAC,1mA,2S) : 1-2 , 1-3
5. RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co. Ltd.		CHOKE
						TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO.
								ATC-07-015R
RELEASE		08/07/2007	Pair	VINCENT	Eugene	UNITS:	SAFETY	SHEET 1 OF 1
						M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						08/07/07		Pair