
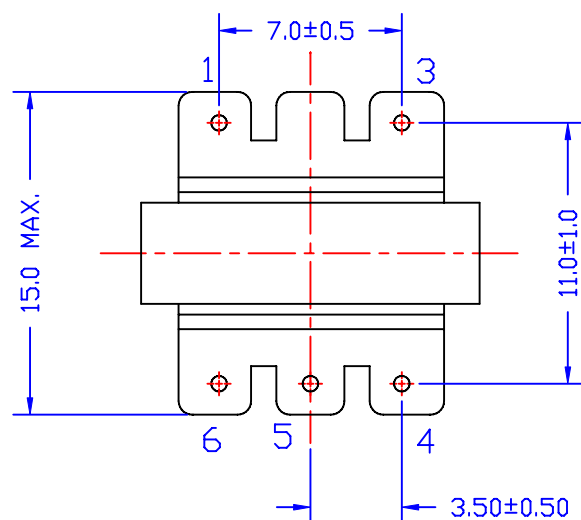
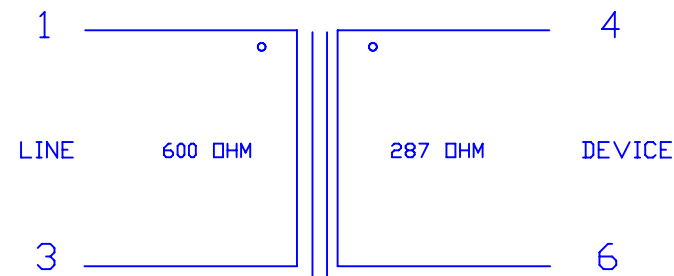


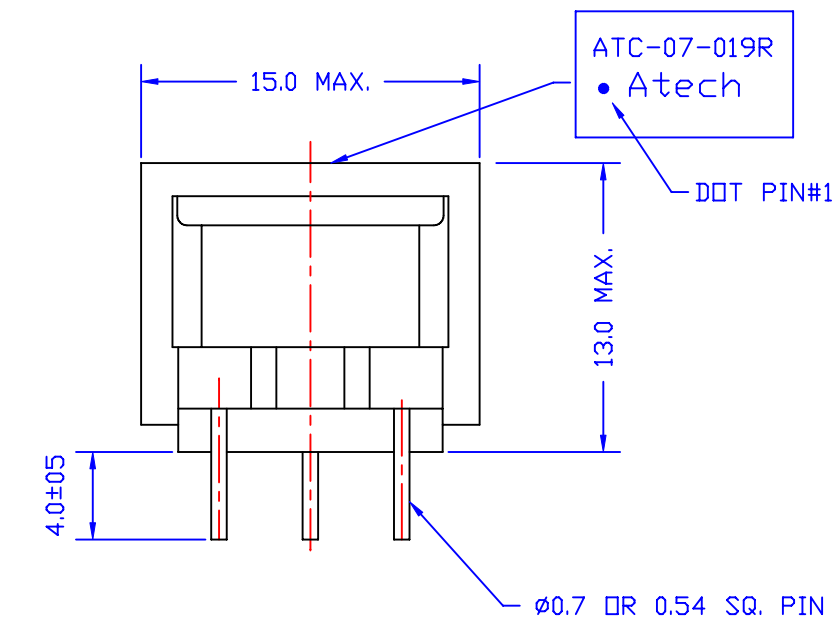

ELECTRICAL CHARACTERISTICS:

- D.C.R : 1-3 = 170 OHM±15%
4-6 = 145 OHM±15%
- INDUCTANCE(@1KHZ,1Vrms) : 1-3 = 2H MIN.
- IMPEDANCE(@1KHZ,1Vrms) : 1-3(4-6 W/H 287 OHM)
= 600 OHM±5%
- INSERTION LOSS(@1KHZ,0dBm) : 1-3(4-6 W/H 287 OHM = 3.5dB MAX.
- FREQ.RESP.(REF. 1KHZ) : 200HZ = ±0.2dB
4KHZ = ±0.2dB
- RETURN LOSS(4-6 W/H 287 OHM) : 200HZ = 20dB MIN.
4KHZ = 20dB MIN.
- TURN RATIO(@15KHZ,1Vrms) : 1-3 : 4-6 = 1±%
- HI-POT(@1200VAC,1mA,2S) : 1-4
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 600: 287 TRANSFORMER	
								DWG. NO. ATC-07-019R	
	RELEASE	08/01/2007	PAIR	VINCENT	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW	
REVISIONS						08/01/07	CTP214008A	Pair	