


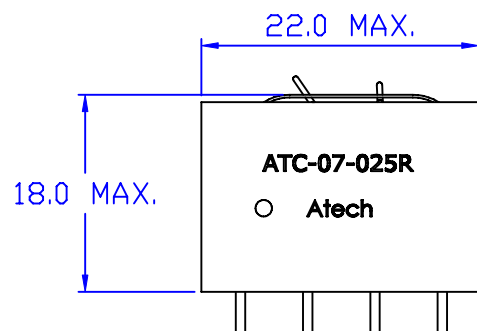
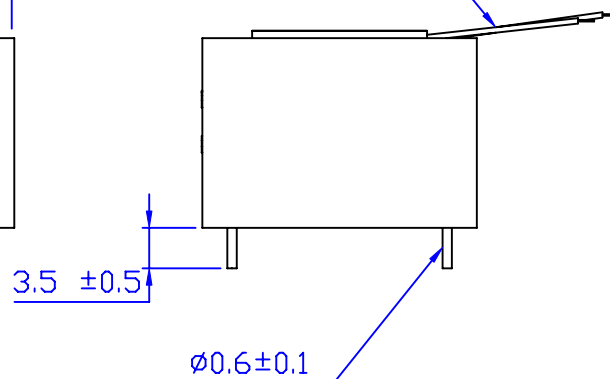


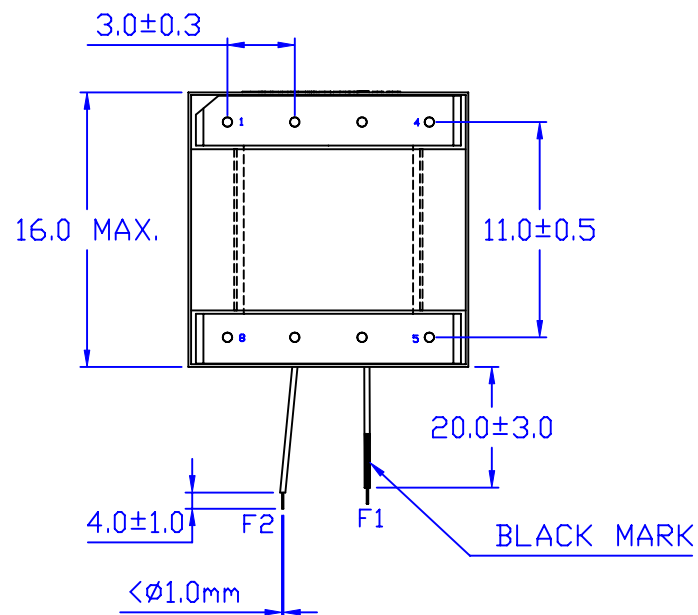

TEFLON TUBE * 2

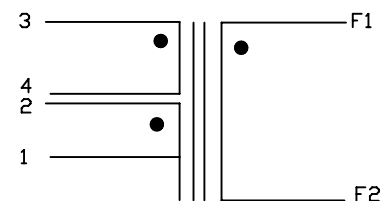

TAPE 3 TS

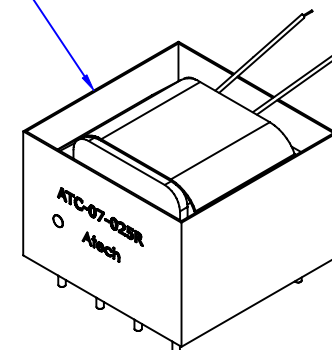

ELECTRICAL CHARACTERISTICS:

- D.C.R: 1-2 = 1.7 Ω M MAX.
3-4 = 0.28 Ω M MAX.
F1-F2 = 22m Ω M MAX.
- INDUCTANCE(@1KHZ,1Vrms) : 1-2 = 1.2mH+10%/-5%
3-4 = 27uH±15%
F1-F2 = 5.88uH±15%
- LEAKAGE INDUCTANCE(@1KHZ,1Vrms,F1-F2,3-4 SHORT) :
1-2 = 300uH MAX.
- TURN RATIO(@100KHZ,0.1Vrms) : 2-1 : 3-4 = 6.66±4%
2-1 : F1-F2 = 14.28±4%
- HI-POT(@2.5KVAC,3mA,1MIN.) : PRI-SEC
(@1.5KVAC,3mA,1MIN.) : PRI-CORE
- INSULATION RE.(@DC500V,100M Ω M, 1MIN.) : PRI-SEC,PRI-CORE,SEC-CORE
(@DC750V,100M Ω M,1MIN.) : WI-W2
- RoHS COMPLIANT

						Atech®		TITLE POWER TRANSFORMER	
						Atech Technology Co. Ltd.		DWG. NO.	
						TEL:0212794-6667 FAX:0212794-8004		ATC-07-025R	
RELEASE		08/31/2007	Pair	WILLIE	Eugene	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		P/N:	
REVISIONS						08/31/07		DRAW	
								SHEET 1 OF 1	
								Pair	