

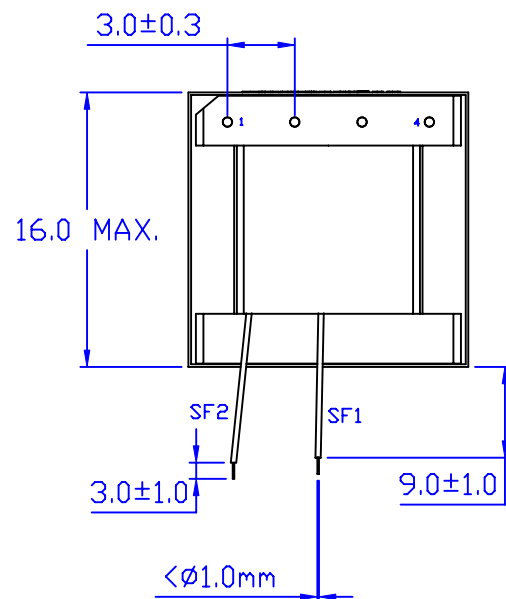
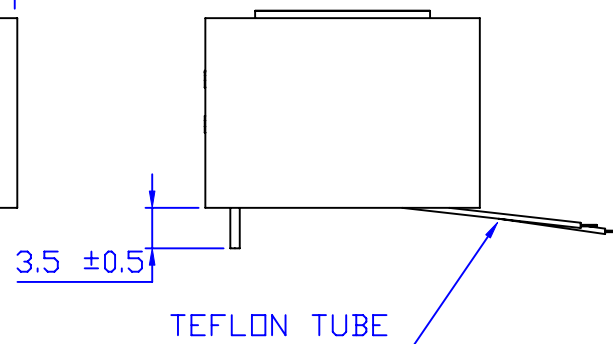
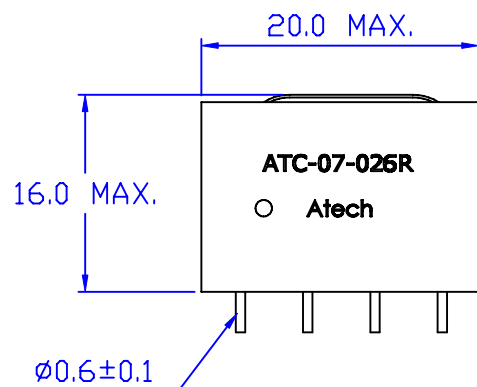


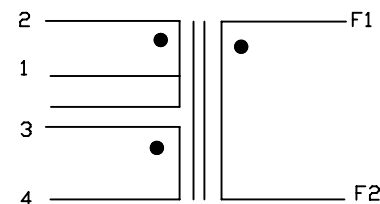

TAPE 3 TS



ELECTRICAL CHARACTERISTICS:

1. D.C.R: 1-2 = 3.2 OHM MAX.
3-4 = 56m OHM MAX.
F1-F2 = 28mOHM MAX.
2. INDUCTANCE(@120KHZ,1Vrms) : 1-2 = 1.4mH±10%
3. LEAKAGE INDUCTANCE(@120KHZ,1Vrms,F1-F SHORT) : 1-2 = 40uH REF.
4. TURN RATIO(@120KHZ,0.1Vrms) : 2-1 : 3-4 = 9.1±2%
2-1 : F1-F2 = 18.2±2%
5. HI-POT(@3750VAC,5mA,1MIN.) : PRI-SEC
(@1KVAC,5mA,1MIN) : PRI-CORE , SEC-CORE
6. INSULATION RE.(@DC500V,100M OHM, 1MIN) : PRI-SEC,PRI-CORE,SEC-CORE
7. RoHS COMPLIANT

						Atech®		TITLE POWER TRANSFORMER	
						Atech Technology Co. Ltd.		DWG. NO.	
						TEL:0212794-6667 FAX:0212794-8004		ATC-07-026R	
RELEASE		08/31/2007	Pair	WILLIE	Eugene	UNITS: M/M		SAFETY	
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE		P/N:	
REVISIONS						08/31/07		DRAW Pair	
								SHEET 1 OF 1	