
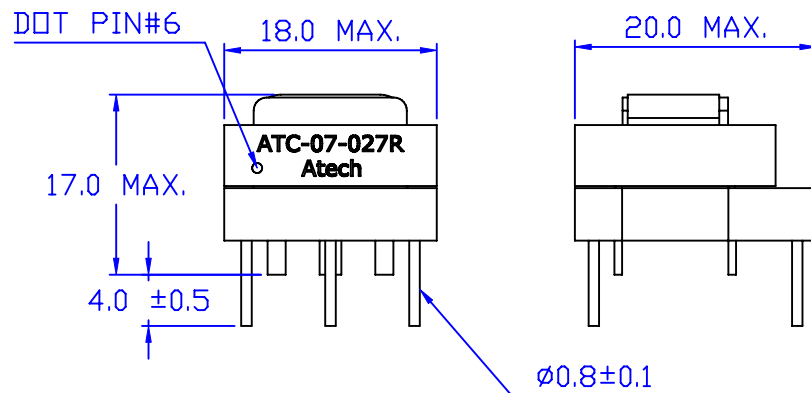



ELECTRICAL CHARACTERISTICS:

1. D.C.R : 1-5 = 120 mΩ MAX. 6-8 = 3.5 Ω MAX
2. INDUCTANCE(@120KHZ,1Vrms) : 6-8 = 1.4mH ±10%
3. LEAKAGE INDUCTANCE(@120KHZ, 1Vrms 1-5 SHORT)
6-8 = 85uH MAX.
4. TURN RATIO(@120KHZ,1Vrms) : 6-8 : 1-5 = 8.75±2%
5. HI-POT(@3KVAC,3mA,1 MIN) : PRI-SEC
(@1.5KVAC,3mA,1 MIN) : PRI-CORE
SEC-CORE
6. INSULATION RES...(@DC750V,100 MΩM, 1 MIN.)
PRI-SEC
PRI-CORE
SEC-CORE
7. RoHS COMPLIANT

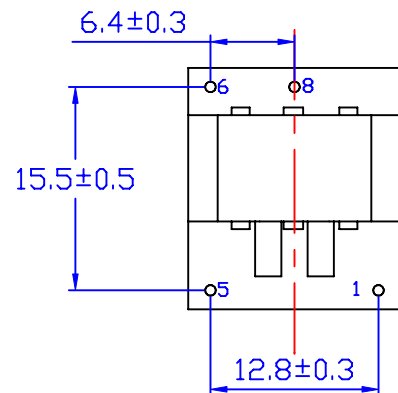

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE POWER TRANSFORMER	
							DWG. NO. ATC-07-027R	
	RELEASE	08/30/2007	Pair	WILLIE	Eugene		UNITS: M/M	SAFETY
NO	DESCRIPTION	DATE	BY	CHK	APPD		DATE	P/N
REVISIONS						08/30/07	DRAW Pair	
								SHEET 1 OF 1