
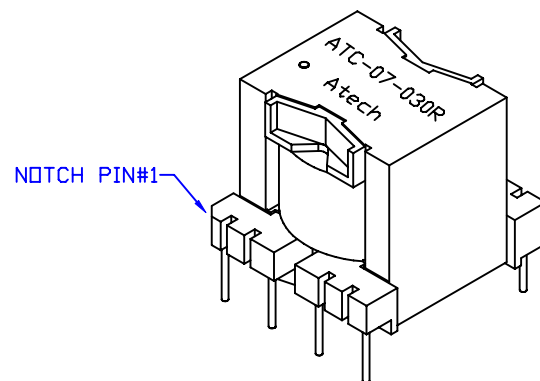
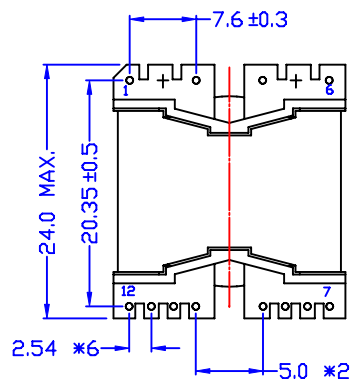
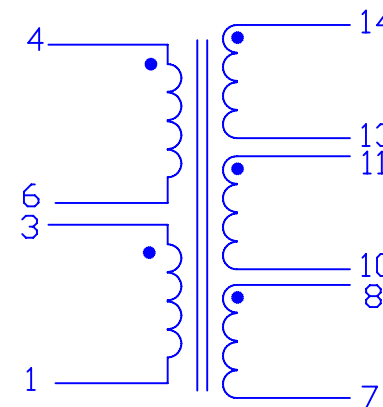
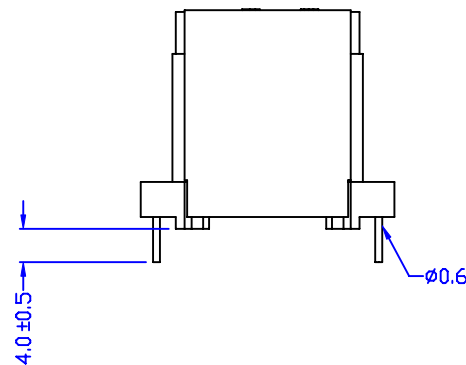




ELECTRICAL CHARACTERISTICS:

- 1.D.C.R : 1-3 = 100 mΩHM MAX. 4-6 = 260 mΩHM MAX.
7-8 = 53 mΩHM MAX. 10-11 = 5.5 mΩHM MAX. 13-14 = 50 mΩHM MAX.
2. INDUCTANCE(@1KHZ,0.1Vrms,ALC = OFF) : 4-6 = 968 uH ±10%
3. TURN RATIO(@10 KHZ, 0.1Vrms) : 4-6 : 3-1 = 5.25±2%
4-6 : 8-7 = 6±1%
4-6 : 14-13 = 6±1%
4-6 : 11-10 = 21±1%
4. HI-POT(@2500VAC,1mA,,2SEC) 1-4 , 7,10,14 ,CORE
4-7,10,14,CORE
7-10,14,CORE
10-14,CORE
14-CORE
5. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE TRANSFORMER	
							DWG. NO. ATC-07-030R	
	RELEASE	10/01/2007	PAIR	WILLIE	EUEGEN	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW <i>Pair</i>
REVISIONS						10/01/07		