
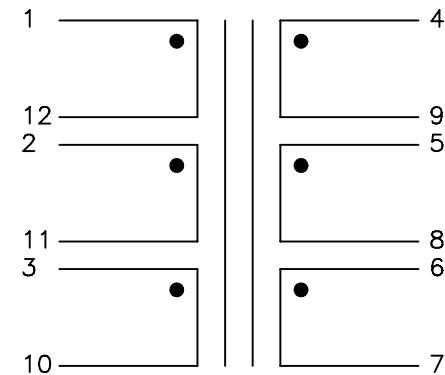
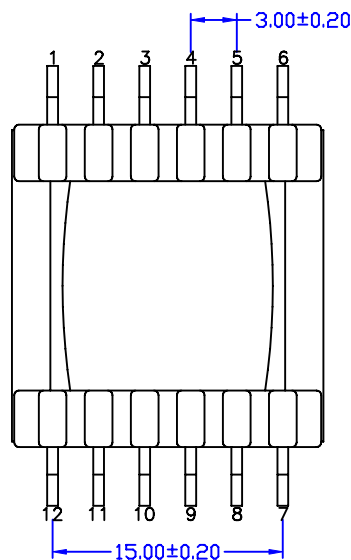
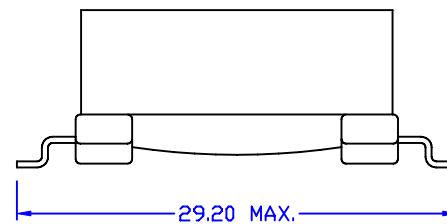
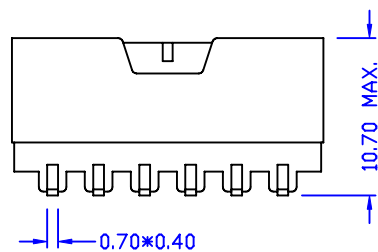


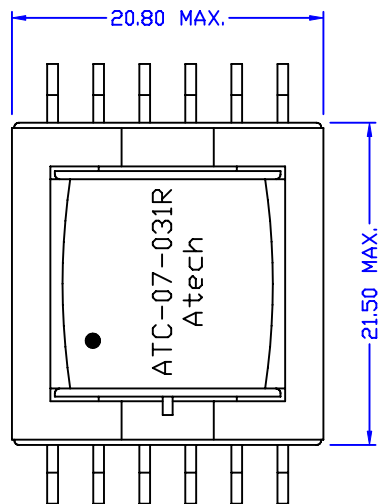

ELECTRICAL CHARACTERISTICS :

1. D.C.R: 1-12 = 47 Ω M MAX. 2-11 = 47 Ω M MAX.
3-10 = 47 Ω M MAX. 4-9 = 47 Ω M MAX.
5-8 = 47 Ω M MAX. 6-7 = 47 Ω M MAX.
2. INDUCTANCE(@100KHZ,0.1Vrms) : 1-12 = 3.4uH±10%
3. LEAKAGE INDUCTANCE(@100KHZ,0.1Vrms) :
1-12 = 105nH TYP. (2-3-4-5-6-7-8-9-10-11 SHORT)
4. TURN RATIO(@3MHZ,0.1Vrms) : 1-12 : 2-11 = 1±5%
1-12 : 3-10 = 1±5%
1-12 : 4-9 = 1±5%
1-12 : 5-8 = 1±5%
1-12 : 6-7 = 1±5%
5. HI-POT(@500VAC,1mA,2S) 1-11 , 3-9 , 5-7
6. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE CHOKE	
								DWG. NO. ATC-07-031R	
	RELEASE	10/08/2007	PAIR	VINCENT	TEUGENE	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 10/08/07			DRAW <i>Pair</i>
REVISIONS									