

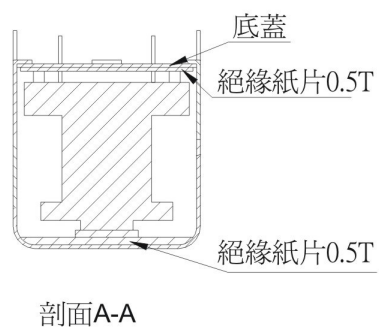

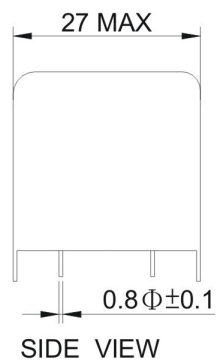


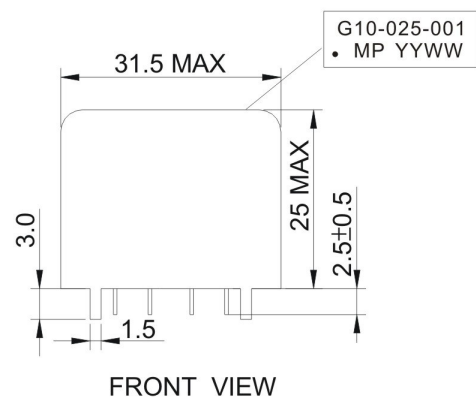

備注:
(1).變壓器產品不可與屏
蔽殼接觸.

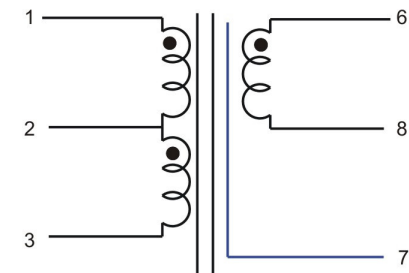

ELECTRICAL CHARACTERISTICS :
 1.D.C.R. : PIN 1-3 = 42 OHM MAX.
 PIN 6-8 = 21 OHM MAX.
 2.INDUCTANCE(@25 HZ , 0.1 Vrms) :
 PIN 1-3 = 2H MIN.
 3.IMPEDANCE(@25HZ , 0.1 Vrms) :
 PIN 1-3 = 0.3K OHM MIN.
 4.TURN RATIO(@300K HZ , 0.5 Vrms) :
 PIN 1-3 : 6-8 = 2 +/- 2%.
 5.HI-POT(@1K VAC , 1mA , 2SEC) : 1-6
 6.DISTORTION(@25 HZ , 1 Vrms) :
 PIN 6-8 = 1.4% MAX.
 (@20K HZ , 1 Vrms) :
 PIN 6-8 = 0.1% MAX.
 7.RoHS COMPLIANT.

						Atech[®] Atech Technology Co., Ltd. TEL: (02)2794-6667 FAX: (02)2794-8004		TITLE TRANSFORMER	
A		09/08/2008	Isaac	Vincent	Eugene			DWG NO. ATC-07-037R	
	RELEASE	11/07/2007	Pair	Willie	Eugene	UNITS M/M	SAFETY		SHEET 1 / 1
NO.	DESCRIPTION	DATE	BY	CHK	APP	DATE 20080908	P/N CTX325000A	DRAW Isaac	
REVISIONS									