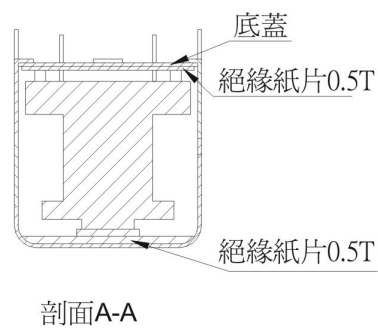

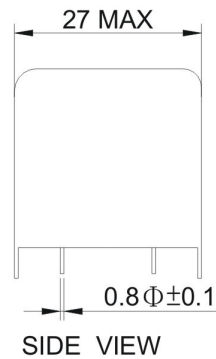
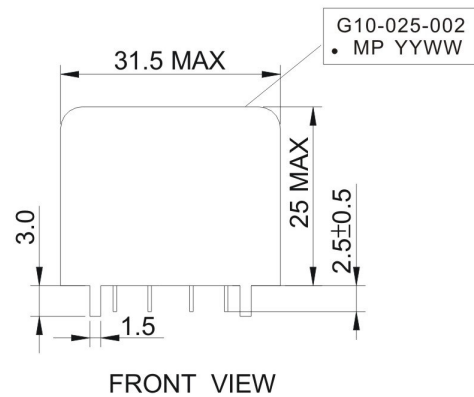


- ELECTRICAL CHARACTERISTICS :
- 1.D.C.R. : PIN 1-3 = 272 OHM MAX.
PIN 6-8 = 25 OHM MAX.
 - 2.INDUCTANCE(@25 HZ , 0.1 Vrms) :
PIN 1-3 = 110H MIN.
 - 3.IMPEDANCE(@25 TO 20K HZ) :
PIN 1-3 = 20K OHM MIN.
 - 4.TURN RATIO(@30K HZ , 0.1 Vrms) :
PIN 1-3 : 6-8 = 11 +/- 1%.
 - 5.HI-POT(@1K VAC , 1mA , 2SEC) :
1-7 , 1-6 , 7-6.
 - 6.DISTORTION(@25 HZ , 1 Vrms) :
PIN 6-8 = 0.1% MAX.
(@20K HZ , 1 Vrms) :
PIN 6-8 = 0.1% MAX.
 - 7.RoHS COMPLIANT.

備注:
(1).變壓器產品不可與屏
蔽殼接觸.

						Atech® Atech Technology Co., Ltd. TEL: (02)2794-6667 FAX: (02)2794-8004		TITLE TRANSFORMER
								DWG NO. ATC-07-038R
A		09/08/2008	Isaac	Willie	Eugene			
	RELEASE	11/07/2007	Pair	Willie	Eugene	UNITS M/M	SAFETY	SHEET 1 / 1
NO.	DESCRIPTION	DATE	BY	CHK	APP	DATE 20080908	P/N CTX325001A	DRAW Isaac
REVISIONS								