

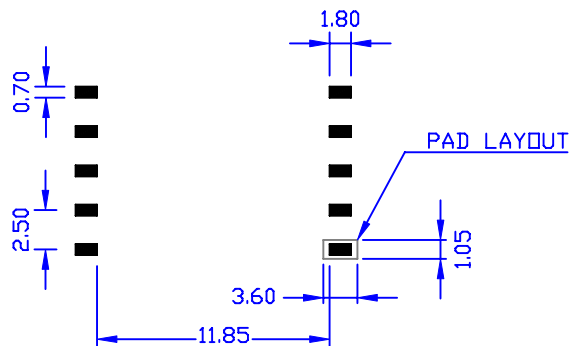







UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

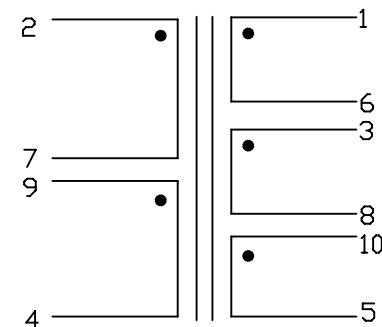

ELECTRICAL CHARACTERISTICS :

1. D.R.C. : 2-7=107 mΩHM MAX, 1-6 = 1080 mΩHM MAX.
3-8 = 1130 mΩHM MAX, 9-4 = 138 mΩHM MAX.
10-5 = 515 mΩHM MAX.
2. INDUCTANCE : (<10KHZ, 1Vrms)
1-6 = 6.4 mH $\pm$ 30% 2-7 = 560 uH $\pm$ 30%
3-8 = 2.3 mH $\pm$ 30% 9-4 = 560 uH $\pm$ 30%
10-5 = 330uH $\pm$ 30%
3. LEAKAGE INDUCTANCE : (<100KHZ, 1Vrms, 7-9,1-6-3-8-10-5 SHORT)
2-4=2 uH MAX.
4. TURN RATIO : (<100KHZ, 1Vrms) :
1-6 : 2-7 = 3.4 $\pm$ 1% , 1-6 : 3-8 = 1.7 $\pm$ 1%
1-6 : 9-4 = 3.4 $\pm$ 1% , 1-6 : 10-5 = 4.53 $\pm$ 1%
5. HI-POT : (<1KVAC, 1mA, 2SEC) 1-2,1-3,1-9,1-10
6. ROHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:0212794-6667 FAX:0212794-8004		DWG. NO.
						UNITS: M/M		ATC-07-041R
						DATE		SHEET 1 OF 1
						11/26/07		
						P/N: CTX413005A		DRAW
						Pair		

RELEASE	11/26/2007	PAIR	Willie	Eugene
NO.	DESCRIPTION	DATE	BY	CHK

REVISIONS

DATE
11/26/07

P/N: CTX413005A

DRAW
Pair