

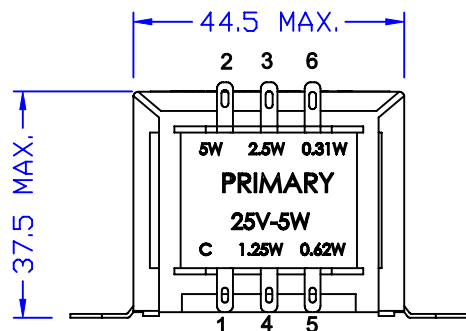
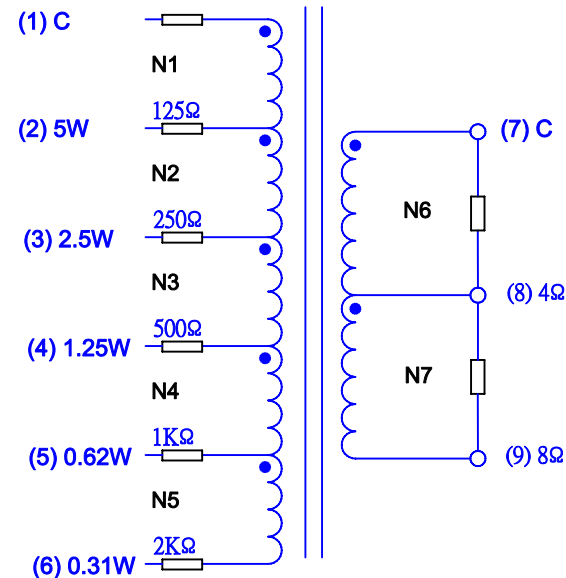
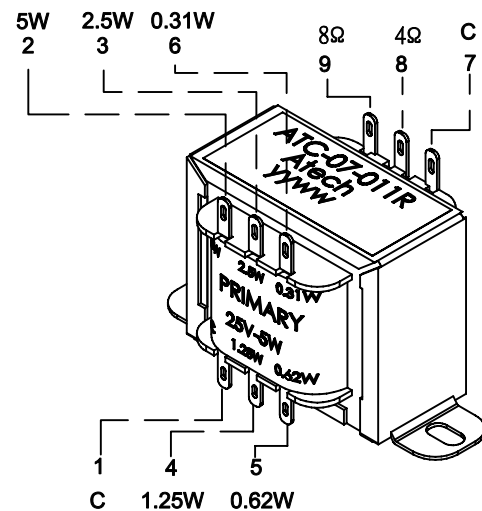


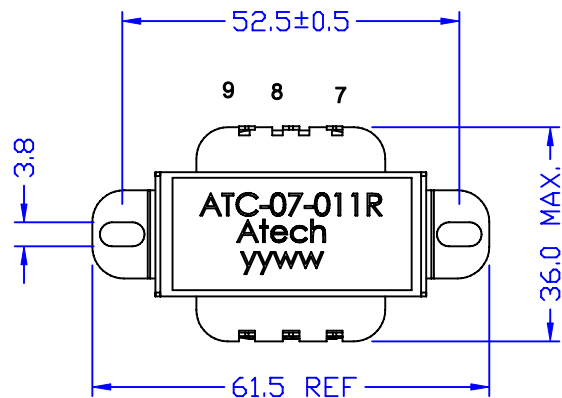

ELECTRICAL CHARACTERISTICS :

- D.C.R : 1-2 = 17 Ω MAX. 1-3 = 25 Ω MAX.
1-4 = 36 Ω MAX. 1-5 = 55 Ω MAX.
1-6 = 80 Ω MAX. 7-8 = 0.46 Ω MAX.
7-9 = 0.68 Ω MAX.
- EXCITING CURRENT: INPUT PRIMARY 25V 5W 60Hz.
- HI-POT TEST : SHALL WITHSTAND WITHOUT BREAKDOWN :
(INPUT 60Hz LEAKAGE CURRENT 5 mA/1MIN.)
1.0 KV FOR ONE MINUTE BETWEEN PRIMARY TO SECONDARY.
1.0 KV FOR ONE MINUTE BETWEEN PRIMARY TO CORE.
1.0 KV FOR ONE MINUTE BETWEEN SECONDARY TO CORE.
- INSULATION TEST : 500VDC 100M Ω MIN.
BETWEEN WINDINGS AND WINDINGS AND CORE.
- $Z(7-9) + 8 \Omega$: 1-2 = 125 $\Omega \pm 15\%$ 1-3 = 250 $\Omega \pm 15\%$
1-4 = 500 $\Omega \pm 15\%$ 1-5 = 1.0 K $\Omega \pm 15\%$
1-6 = 2.0 K $\Omega \pm 15\%$

6. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-8887 FAX: (02) 2794-8004		TITLE IMPEDANCE TRANSFORMER	
								DWG. NO. ATC-07-011R	
	RELEASE	06/06/2007	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						06/06/07			