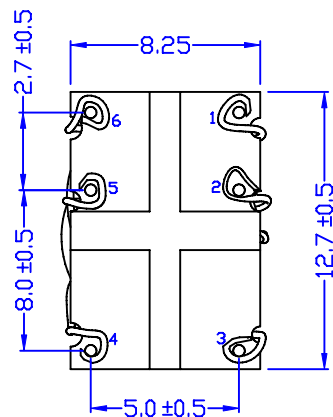
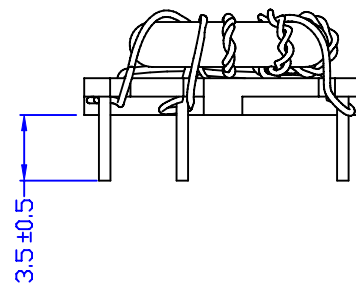
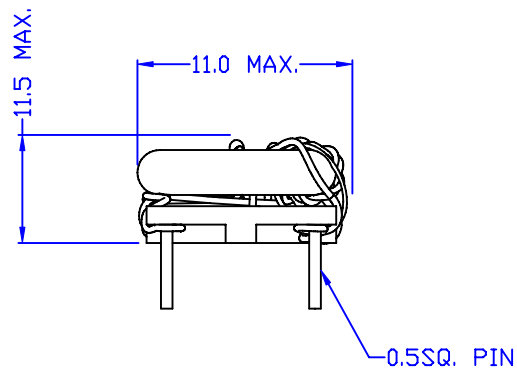



ELECTRICAL CHARACTERISTICS:

1. D.C.R : 1-6 = 20m Ω HM MAX.
2-5 = 20m Ω HM MAX.
3-4 = 20m Ω HM MAX.
2. INDUCTANCE(@10KHZ, 50mVrms) :
1-6 = 10.8uH $\pm$ 30%
2-5 = 10.8uH $\pm$ 30%
3-4 = 10.8uH $\pm$ 30%
3. TURN RATIO(@2MHZ, 50mVrms)
1-6 : 2-5 = 1 $\pm$ 1%
1-6 : 3-4 = 1 $\pm$ 1%
4. HI-POT(@1500VAC,1mA,2S) : 1-5 , 1-4
5. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE CHOKE
								DWG. NO. ATC-08-004R
	RELEASE	02/21/2008	Pair	VINCENT	Eugene	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW <i>Pair</i>
REVISIONS						02/21/08		