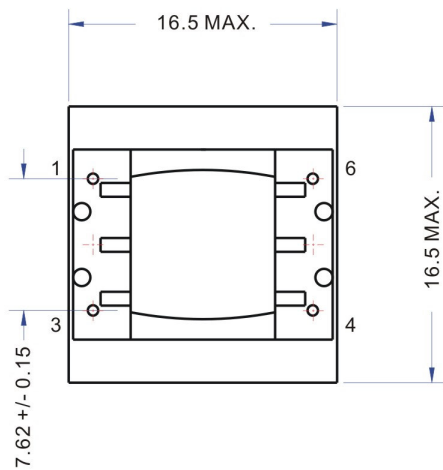
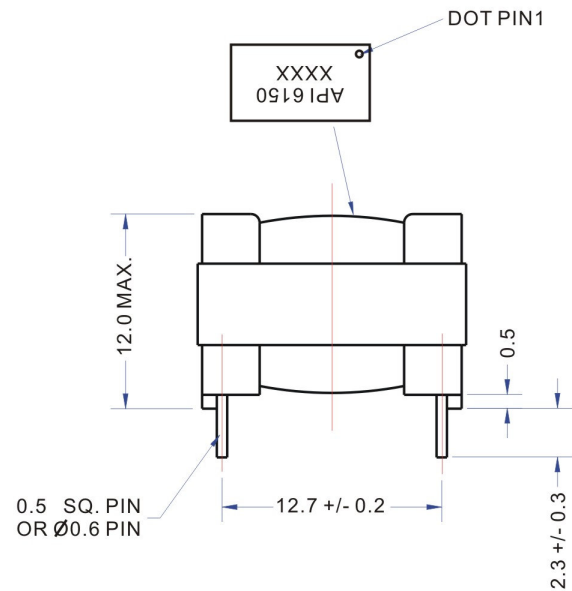


ELECTRICAL CHARACTERISTICS :

- 1.D.C.R. : PIN 1-3 = 33 OHM MAX. PIN 4-6 = 66 OHM MAX.
- 2.INDUCTANCE(@200HZ , 0.1Vrms , PARALLEL): PIN 1-3 = 1.2H MIN.
- 3.RETURN LOSS : (REF. 600 OHM) 200HZ-1KHZ = 18dB MIN.
4KHZ = 12dB MIN.
- 4.FREQ. RESPONSE : (REF. 1KHZ) 200HZ-4KHZ = -0.3dB MAX.
10KHZ = -2dB MAX.
- 5.TURN RATIO : (10KHZ , 0.1Vrms) PIN 4-6 : 1-3 = 2 +/- 1%.
- 6.HI-POT : (@3KVAC , 1mA , 1 MINUTE) PIN 1-4.
- 7.RoHS COMPLIANCE.

						Atech[®] Atech Technology Co., Ltd. TEL: (02)2794-6667 FAX: (02)2794-8004		TITLE TRANSFORMER	
								DWG NO. ATC-08-021R	
	RELEASE	08/21/2008	Isaac	Vincent	Eugene	UNITS M/M	SAFETY		SHEET 1 / 1
NO.	DESCRIPTION	DATE	BY	CHK	APP	DATE 20080821			DRAW Isaac
REVISIONS									