
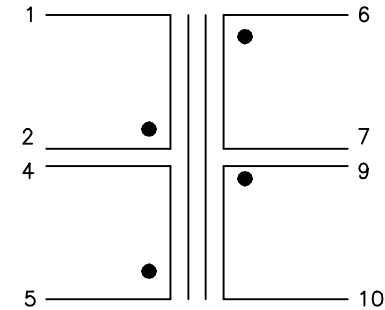
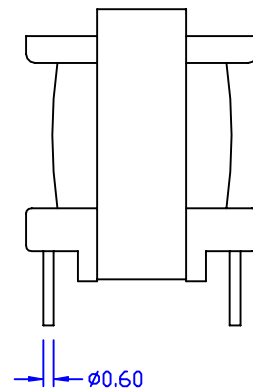
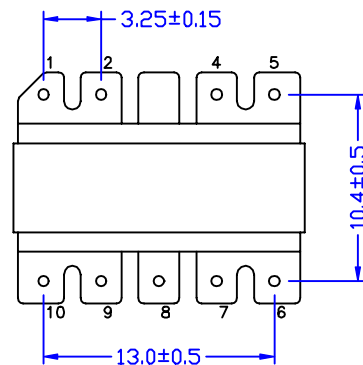
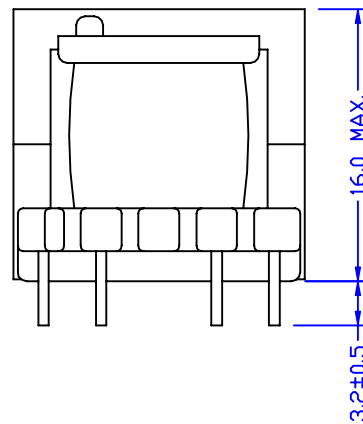


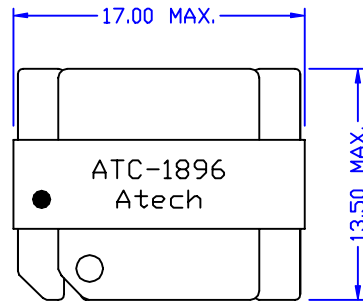

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 0.85 OHM MAX.
PIN 4-5 = 0.70 OHM MAX.
PIN 6-7 = 7.8 OHM MAX.
PIN 9-10 = 7.8 OHM MAX.
- INDUCTANCE (@1KHZ,0dBm) :
PIN 1-2 (W/O DC) = 3mH MAX.
PIN 1-2 (W/H 80mADC) = 2mH MIN.
- INTERWINDING CAP. (@1KHZ,0dBm) :
PIN 1-4 = 250 PF MIN.
PIN 1-6 = 400 PF MIN.
PIN 4-6 = 350 PF MIN.
PIN 6-9 = 480 PF MIN.
- URNS RATIO (@10KHZ,0dBm,W/H PIN 2-4, 7-9 SHORT):
PIN 6-10:5-1 = 2±1%.
- HI-POT (@200VAC , 1mA, 1 MINUTE) :
PIN 1-4,1-6,1-9
PIN 4-6,4-9,6-9

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE DKTS TRANSFORMER	
								DWG. NO. ATC-1896	
B A		3.2±0.5 PHASE	01/30 /2004	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.		DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS							DRAW Pair		