

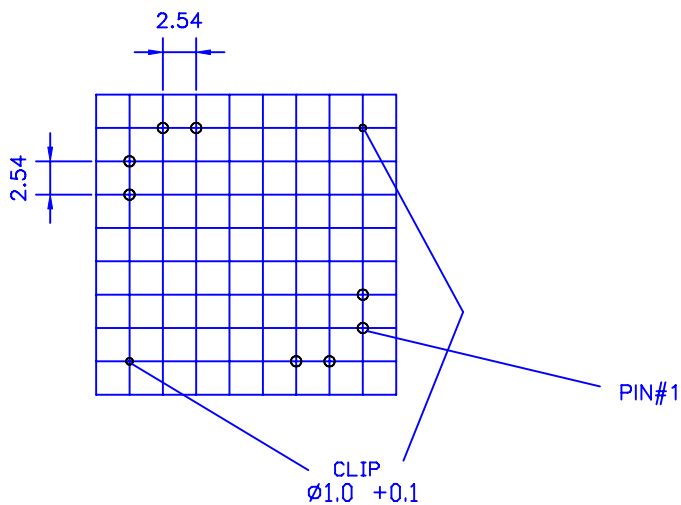
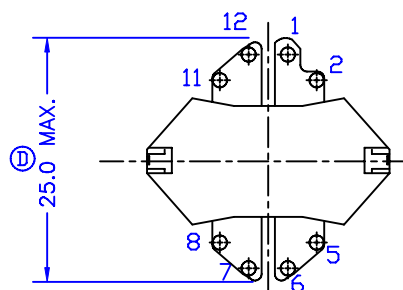


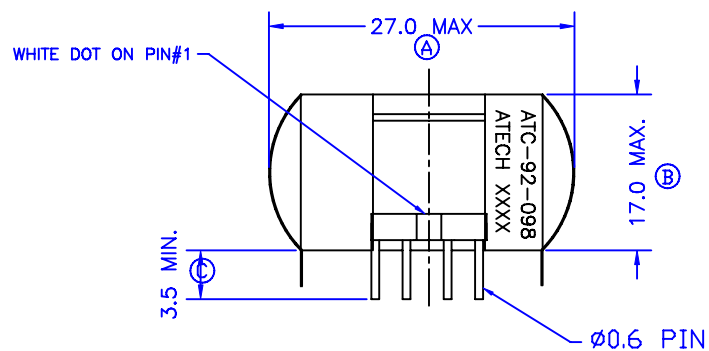

GRID 2.54



ELECTRICAL CHARACTERISTICS:

- D.C.R : 2-5 = 86 Ω M $\pm$ 10%
8-11 = 112 Ω M $\pm$ 10%
- INDUCTANCE(@1KHZ,1Vrms) : 2-5 = 9.3 Ω M MIN.
- Z(@1KHZ,1Vrms,11-8 W/H 600 Ω M LOAD) :
2-5 = 800 $\pm$ 2% Ω M
- INSERTION LOSS(@1KHZ,1Vrms,11-8 W/H 600 Ω M LOAD) = 1.26 $\pm$ 0.1dB
- FREQ.RESP(REF.1KHZ) :
@20HZ = -0.21 $\pm$ 0.1dB
@100HZ = 0 $\pm$ 0.1dB
@4KHZ = -0.11 $\pm$ 0.1dB
@50KHZ = -4.70 $\pm$ 0.15dB
- TURN RATIO(@1KHZ, 1Vrms) : 2-5 : 11-8 = 1 $\pm$ 1%
- LONGITUDINAL BAL.(@4KHZ) = 60dB MIN.
- HI-POT(500VAC, 1mA, 1 MINUTE) : 2-8,2-CORE,8-CORE
- RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:0212794-6667 FAX:0212794-8004		DWG. NO.
								ATC-92-098R
RELEASE		05/29/2008	Pair	Willie	Eugene	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	P/N:	DRAW
						05/29/08	CTP808003A	Pair