
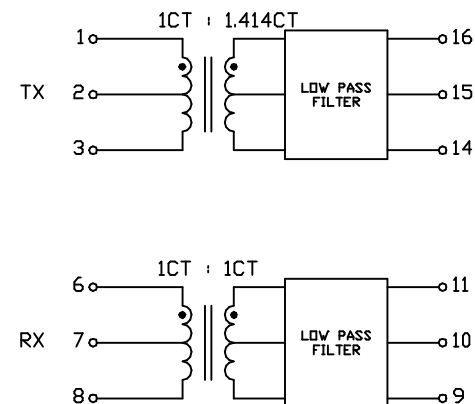

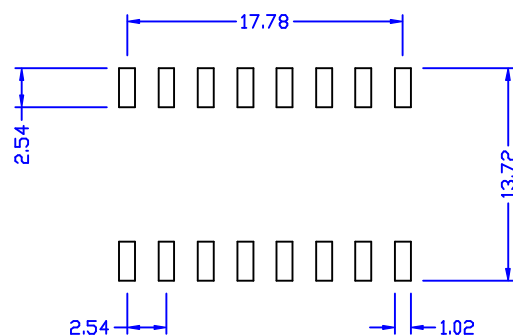
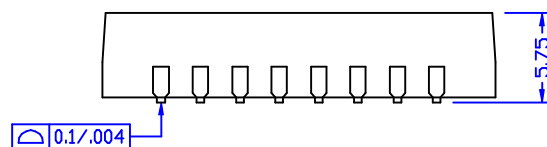


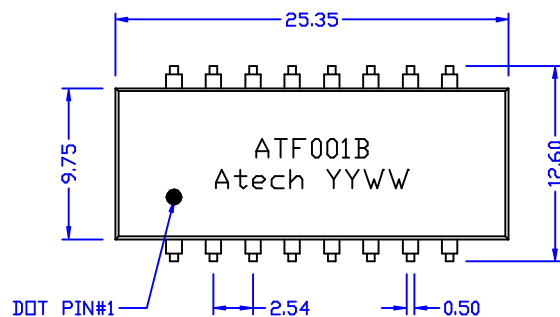

ELECTRICAL SPECIFICATIONS @ 25°C :

1. TURNS RATIO : TX = 1CT : 1.414CT
RX = 1CT : 1CT
2. HI-POT : 2000Vrms
3. CUTOFF FREQUENCY : 17MHZ TYP.
4. ATTENUATION 30MHZ : TX = -27dB MIN.
RX = -18dB MIN.
5. RETURN LOSS : 5-10MHZ = -20dB MIN.
6. CROSS TALK : 1-10MHZ = -30dB MIN.
7. INSERTION LOSS : 5-10MHZ = -1.0dB MAX.

TOLERANCES : XX.X ± 0.25
X.XX ± 0.05

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10 BASE-T FILTER INTERFACE	
								DWG. NO.	
A	T/R = 1 : 1.414	09/26 /2002	DOLLY	AL	SUEDY	UNITS: M/M		SAFETY	ATF001B
	RELEASE	08/01 /2002	DOLLY	CPLIU	SUEDY				SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW <i>Pair</i>		
REVISIONS						08/01/02			