


TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

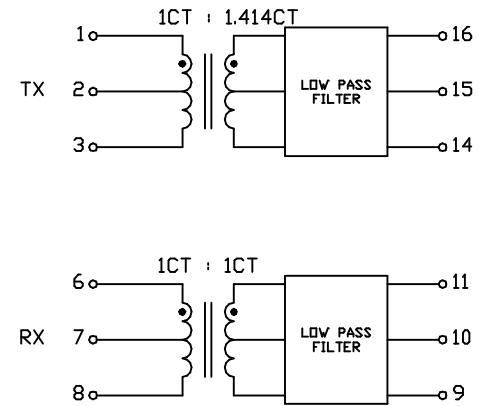

ELECTRICAL SPECIFICATIONS @25°C :

1. TURNS RATIO : TX = 1CT : 1.414CT
RX = 1CT : 1CT
2. HI-POT : 2000Vrms
3. CUTOFF FREQUENCY : 17MHZ TYP.
4. ATTENUATION 30MHZ : TX = -27dB MIN.
RX = -18dB MIN.
5. RETURN LOSS : 5-10MHZ = -20dB MIN.
6. CROSS TALK : 1-10MHZ = -30dB MIN.
7. INSERTION LOSS : 5-10MHZ = -1.0dB MAX.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10 BASE-T FILTER INTERFACE	
								DWG. NO. ATF001C	
RELEASE		09/30/2002	DOLLY	AL	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 09/30/02			
REVISIONS								SHEET 1OF 1	
								DRAW <i>Pair</i>	