

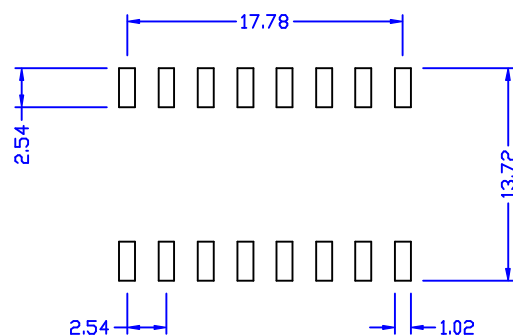
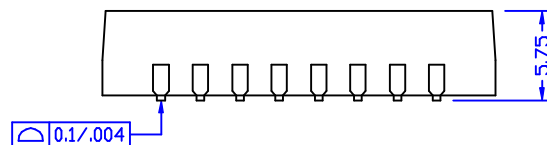


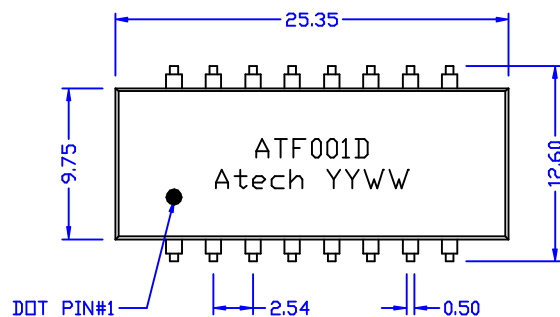

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

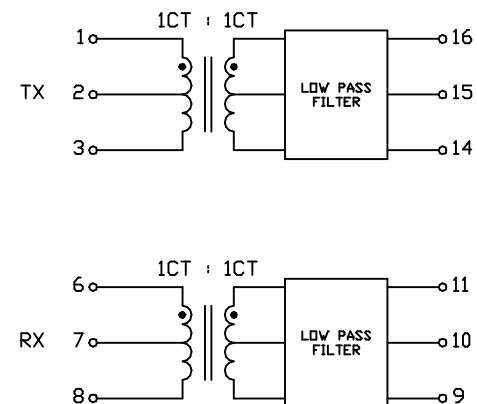

ELECTRICAL SPECIFICATIONS @25°C :

1. TURNS RATIO : TX = 1CT : 1CT
RX = 1CT : 1CT
2. HI-POT : 2000Vrms
3. CUTOFF FREQUENCY : 17MHZ TYP.
4. ATTENUATION 30MHZ : TX = -27dB MIN.
RX = -18dB MIN.
5. RETURN LOSS : 5-10MHZ = -20dB MIN.
6. CROSS TALK : 1-10MHZ = -30dB MIN.
7. INSERTION LOSS : 5-10MHZ = -1.0dB MAX.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE 10 BASE-T FILTER INTERFACE	
							DWG. NO. ATF001D	
	RELEASE	10/18/2002	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 10/18/02		DRAW <i>Pair</i>
REVISIONS								