
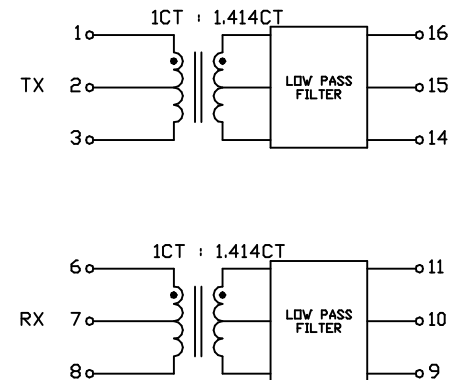

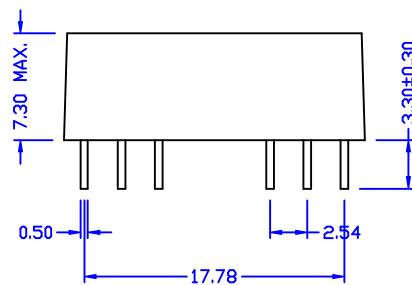


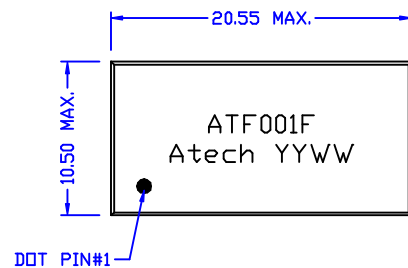

ELECTRICAL SPECIFICATIONS @25°C :

1. TURNS RATIO : TX = 1CT : 1.414CT
RX = 1CT : 1.414CT
2. HI-POT : 2000Vrms
3. CUTOFF FREQUENCY : 17MHZ TYP.
4. ATTENUATION 30MHZ : TX = -27dB MIN.
RX = -18dB MIN.
5. RETURN LOSS : 5-10MHZ = -20dB MIN.
6. CROSS TALK : 1-10MHZ = -30dB MIN.
7. INSERTION LOSS : 5-10MHZ = -1.0dB MAX.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-9004		TITLE 10 BASE-T L/P FILTER	
								DWG. NO. ATF001F	
	RELEASE	12/14/2004	PAIR	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						12/14/04			