
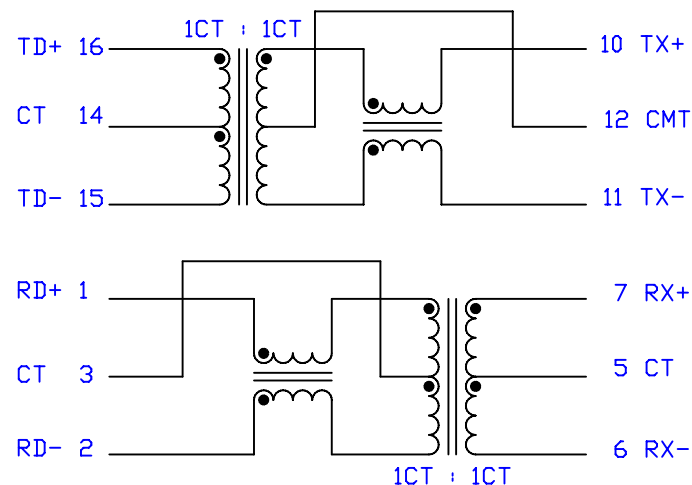
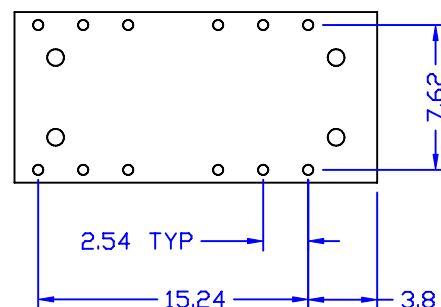
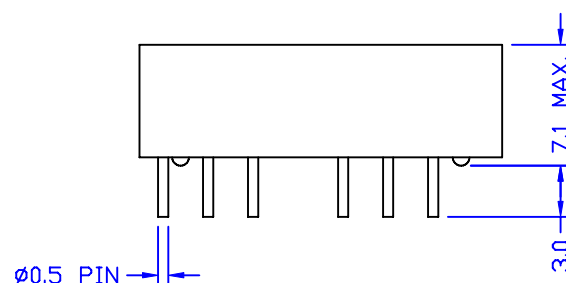


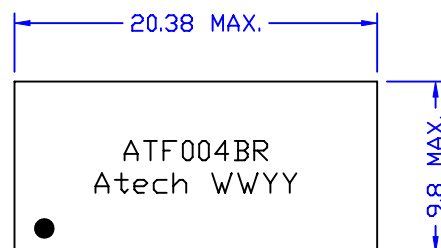

SPECIFICATIONS :

1. INSERTION LOSS (100KHZ-125MHZ) : -1.1dB MAX.
2. RETURN LOSS (100KHZ-60MHZ) : -18dB TYP. (TX)/-17dB TYP.(Rx)
(60-100 MHZ) : -13dB TYP. (Tx)/-15dB TYP.(Rx)
3. CMRR : (100KHZ-60MHZ) -42dB MIN. (Tx)/-40dB MIN.(Rx)
(60MHZ-100MHZ) -40dB MIN. (Tx)/-35dB MIN.(Rx)
4. CROSSTALK : (100KHZ-60MHZ) -40dB MIN.
(60MHZ-100MHZ) -38dB MIN.
5. RISE TIME (10-90%) : 2.5ns TYP.
6. HI-POT TEST : 1500 Vrms (INPUT/OUTPUT)
7. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE FILTER MODULES 10/100BASE-TX	
								DWG. NO. ATF004BR	
A	CUT PIN# 8,9,	08/07/2007	PAIR	WILLIE	EUGENE	UNITS: M/M		SAFETY	
	RELEASE	06/01/2006	PAIR	AL	SUEDY				
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW	
REVISIONS						06/01/06		Pair	