
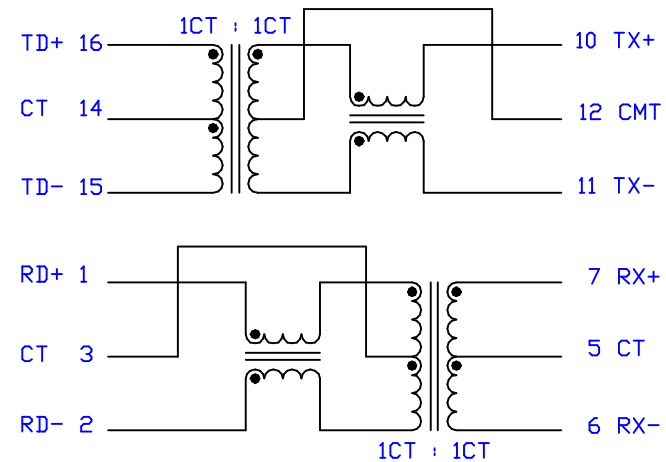


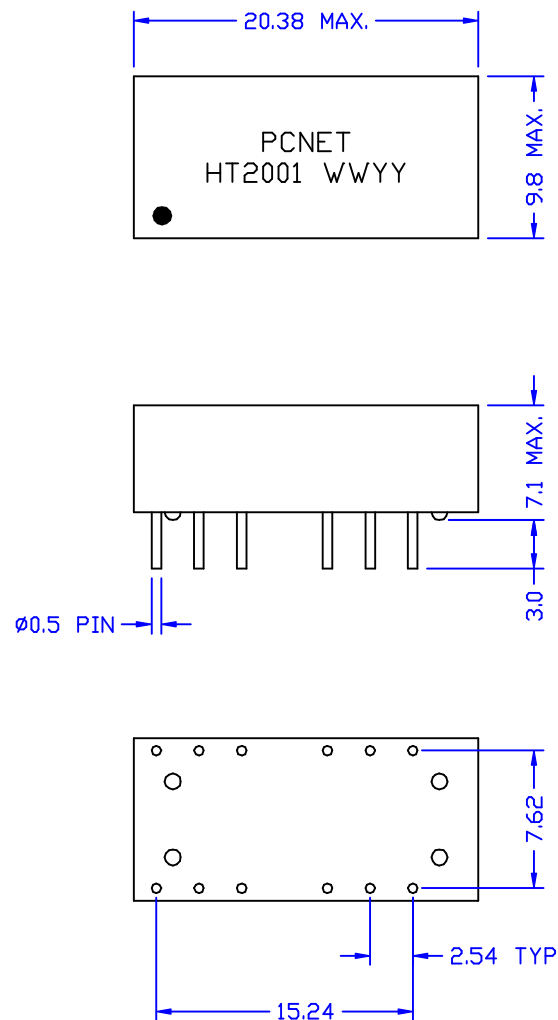

SPECIFICATIONS :

1. INSERTION LOSS (100KHZ-125MHZ) : -1.1dB MAX.
2. RETURN LOSS (100KHZ-60MHZ) : -18dB TYP. (TX)/-17dB TYP.(Rx)
(60-100 MHZ) : -13dB TYP. (Tx)/-15dB TYP.(Rx)
3. CMRR : (100KHZ-60MHZ) -42dB MIN. (Tx)/-40dB MIN.(Rx)
(60MHZ-100MHZ) -40dB MIN. (Tx)/-35dB MIN.(Rx)
4. CROSSTALK : (100KHZ-60MHZ) -40dB MIN.
(60MHZ-100MHZ) -38dB MIN.
5. RISE TIME (10-90%) : 2.5ns TYP.
6. HI-POT TEST : 1500Vrms (INPUT/OUTPUT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE FILTER MODULES 10/100 BASE-TX	
A	MARKING	02/02 /2002	DOLLY	AL	SUEDY		DWG. NO. ATF004C	
	RELEASE	01/16 /2002	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW Pair
REVISIONS						01/16/02		