
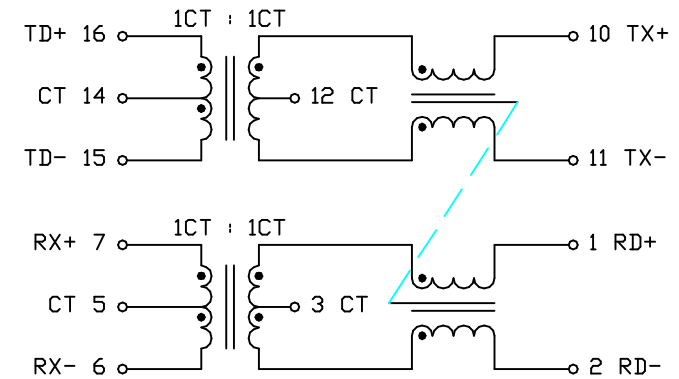


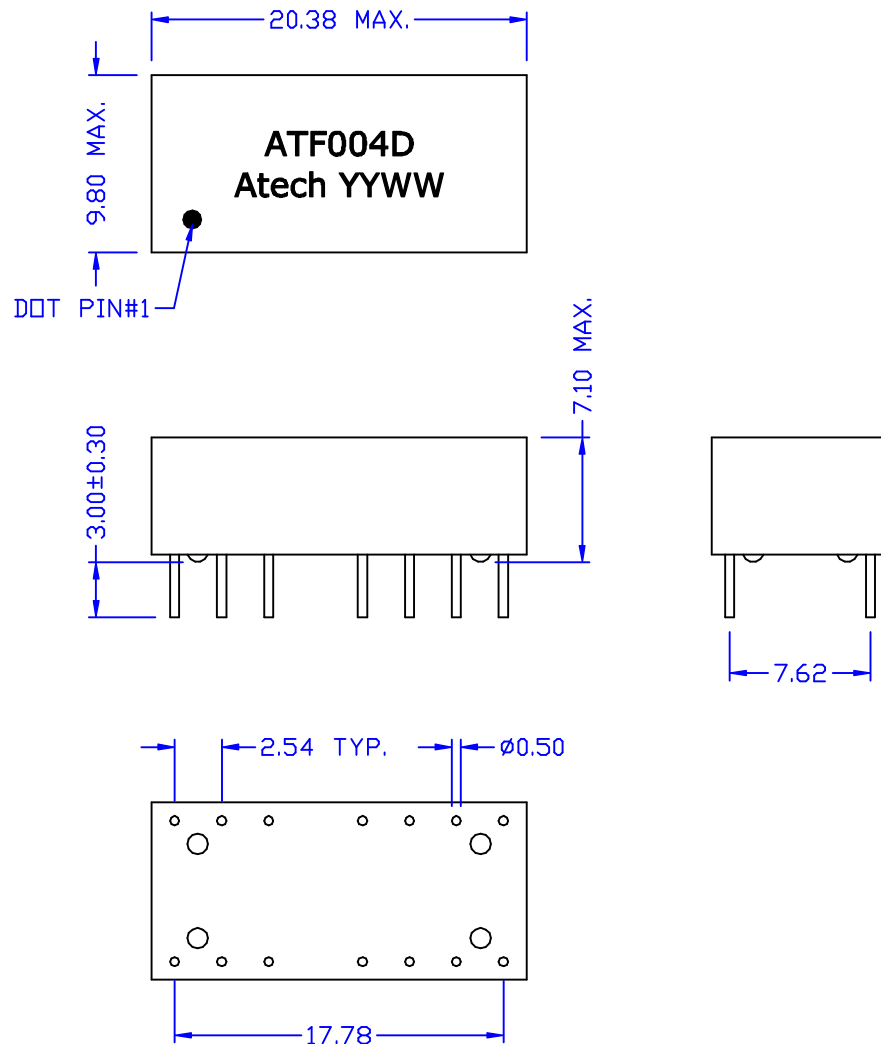

ELECTRICAL SPECIFICATIONS :

1. TURNS RATIO : TX = 1CT : 1CT
RX = 1CT : 1CT
2. HI-POT : 1500Vrms
3. RISE TIME 10-90% : 2.5ns TYP.
4. INSERTION LOSS : 0.1-125MHZ = -1.1dB MAX.
5. CROSS TALK : 0.1-60MHZ = -40dB MIN.
60-100MHZ = -38dB MIN.
6. RETURN LOSS TX/RX : 0.1-60MHZ = -18/-17dB TYP.
60-100MHZ = -13/-15dB TYP.
7. CMRR TX/RX : 0.1-60MHZ = -42/-40dB MIN.
60-100MHZ = -40/-35dB MIN.

DIMENSIONS : mm
UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL:02/2794-6667 FAX:02/2794-8004		TITLE 10/100 BASE-TX TRANSFORMER	
								DWG. NO. ATF004D	
	RELEASE	01/27/2003	DOLLY	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						01/27/03			
								DRAW	Pair