


TOLERANCE : ± 0.25

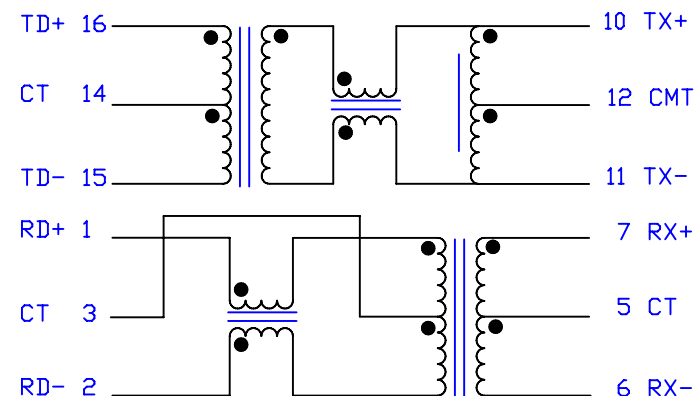

SPECIFICATIONS:

1. INSERTION LOSS(1MHZ-125MHZ) : -1.1dB MAX.
2. RETURN LOSS(100KHZ-60MHZ) : -18dB TYP.(TX)/-17dB TYP.(Rx)
(60-100 MHZ) : -13dB TYP.(Tx)/-15dB TYP.(Rx)
3. CMRR : (100KHZ-60MHZ) -42dB MIN.(Tx)/-40dB MIN.(Rx)
(60MHZ-100MHZ) -40dB MIN.(Tx)/-35dB MIN.(Rx)
4. CROSSTALK : (100KHZ-60MHZ) -40dB MIN.
(60MHZ-100MHZ) -38dB MIN.
5. RISE TIME (10-90%) : 2.5ns TYP.
6. HI-POT TEST : 1500 Vrms<INPUT/OUTPUT>
7. RoHS COMPLIANT

						Atech®		TITLE FILTER MODULES 10/100BASE-TX	
						Atech Technology Co., Ltd.		DWG. NO. ATF004R	
						TEL:(02)2794-6667 FAX:(02)2794-8004			
RELEASE		07/24/2006	PAIR		SUEDY	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						07/24/06		DRAW Pair	