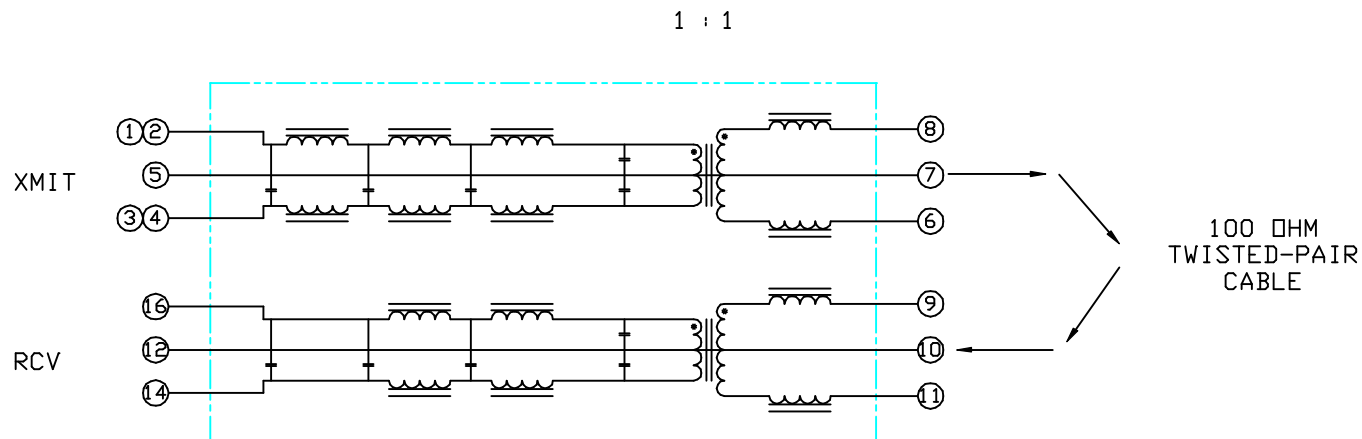
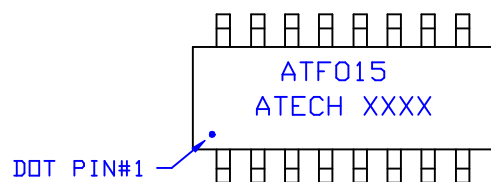


SUGGESTED FOOTPRINT

ELECTRICAL CHARACTERISTICS : (PE-68026 COMPATIBLE, IR REFLOWBLE 235±5°C)

1. INSERTION LOSS(1-10 MHZ): -1.0dB MAX.
2. RETURN LOSS(1-10 MHZ): -15dB MIN.
3. CMRR (XMIT): @5 MHZ : -60dB MIN.
@10 MHZ : -60dB MIN.
@50-100 MHZ : -50dB MIN.
4. CROSSTALK (5-10MHZ): -35dB MIN.
5. ATTENUATION (XMIT): @30 MHZ : -30dB MIN.
@40 MHZ : -32dB MIN.
@100 MHZ : -27dB MIN.
6. HI-POT TEST : 1500 Vrms

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 10 BASE-T TRANSFORMER		
							DWG. NO. ATF015		
A	H=8.5 MAX.	09/12/2001	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
	RELEASE	05/11/00	RORY		SUEDY				
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						05/11/00			<i>Pair</i>