

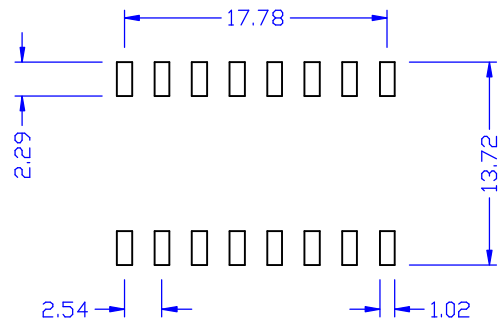
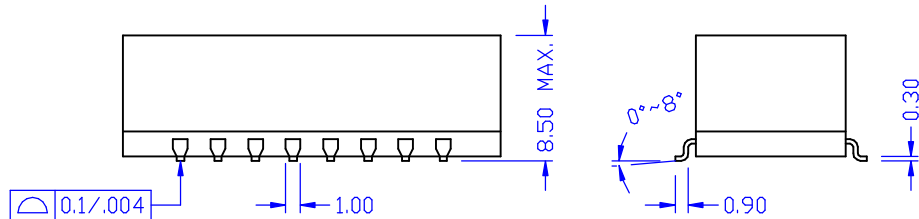


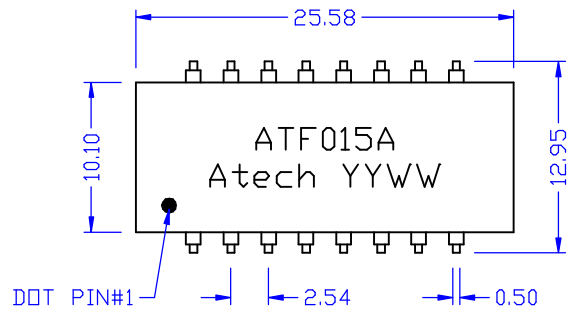

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

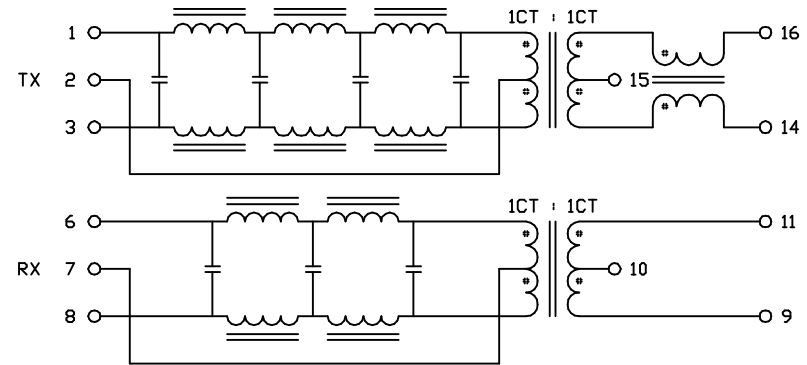

ELECTRICAL SPECIFICATIONS @25°C :

1. TURNS RATIO : TX/RX = 1CT : 1CT
2. INSERTION LOSS : 1-10MHZ = -1.0dB MAX.
3. ATTENUATION TX/RX : 30MHZ = -30/-20dB MIN.
50MHZ = -35/-35dB MIN.
4. HI-POT : 1500V_{rms}
5. RETURN LOSS TX/RX : 5-10MHZ = -15dB MIN.
6. CMRR : 1-100MHZ = -30dB MIN.
7. CROSS TALK : 1-10MHZ = -35dB MIN.

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE 10 BASE-T FILTER	
							DWG. NO.	ATF015A
	RELEASE	10/25/2002	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						10/25/02		