


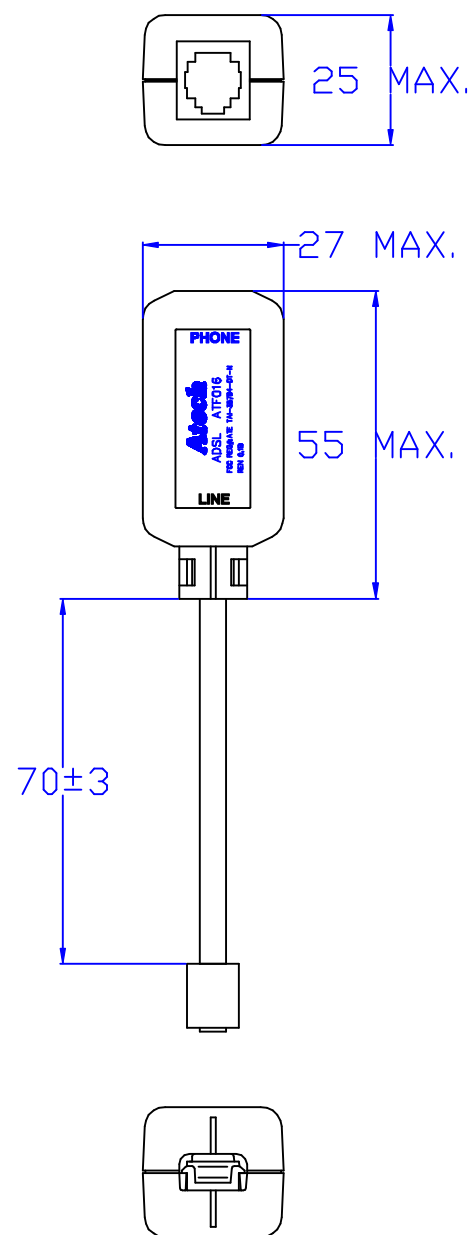

ELECTRICAL CHARACTERISTICS :

1. INSERTION LOSS : (<@300HZ) = 0.5 dB MAX.
(<@1KHZ) = 0.5 dB MAX.
(<@4KHZ) = 2 dB MAX.
2. ATTENUATION : (<@6KHZ) = 3 dB MIN.
(<@10KHZ) = 8 dB MIN.
(<@20KHZ) = 18 dB MIN.
(<@30KHZ) = 25 dB MIN.
(<@40KHZ) = 30 dB MIN.

						Atech®		TITLE ADSL POTS FILTER	
						Atech Technology Co., Ltd.		DWG. NO. ATF016	
A ADD FCC NO.		04/06 /2001	PAIR		SUEDY	UNITS: M/M		SAFETY	
RELEASE		08/15 /00	FENG		SUEDY	DATE		SHEET 1 OF 1	
NO. DESCRIPTION		DATE	BY	CHK	APPD	08/15/00		DRAW Pair	
REVISIONS									