

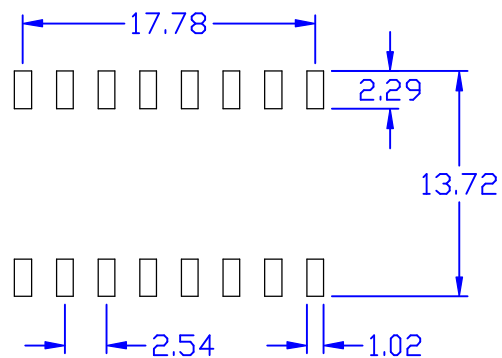
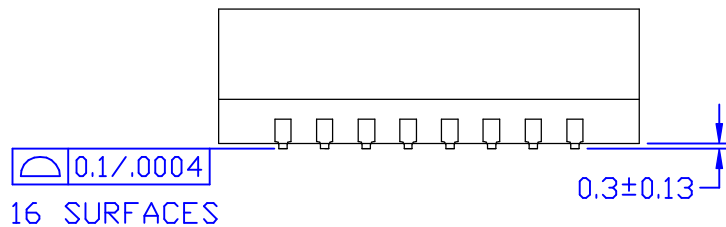
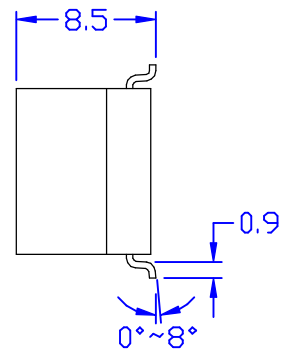


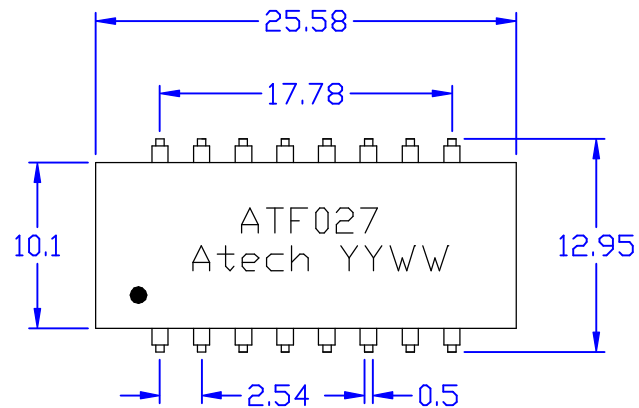

PCB Suggest pad layout.

Tolerances : ± 0.25

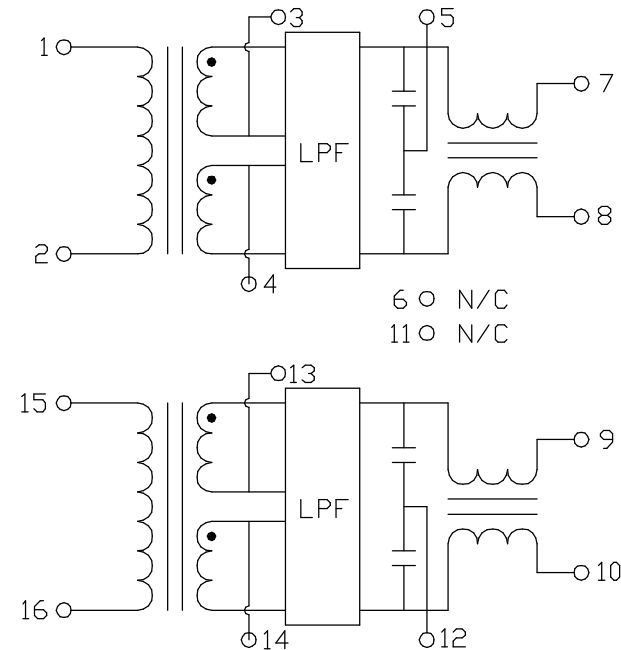

ELECTRICAL SPECIFICATIONS @25°C : (PE-67583 COMPATIBLE)

- INSERTION LOSS (dB) : 12KHZ 4MHZ 16MHZ 24MHZ 36MHZ
-3.0MAX -0.6MAX -1.0MAX -1.6MAX -10MIN
- RETURN LOSS (dB MIN) : 1-17MHZ 17-25MHZ
-16 -9.0
- COMMON TO COMMON REJECTION (dB MIN) : 5MHZ 20MHZ 200MHZ
-20 -25 -20
- CROSS TALK (dB MIN) : 5MHZ 16MHZ 24MHZ
-50 -50 -46
- HI-POT : 600 Vrms

						Atech®		TITLE ATM 25 MBPS FILTER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:(02)2794-6667 FAX:(02)2794-8004		ATF027	
RELEASE		05/30/2001	DOLLY		SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						05/30/01		DRAW Pair	