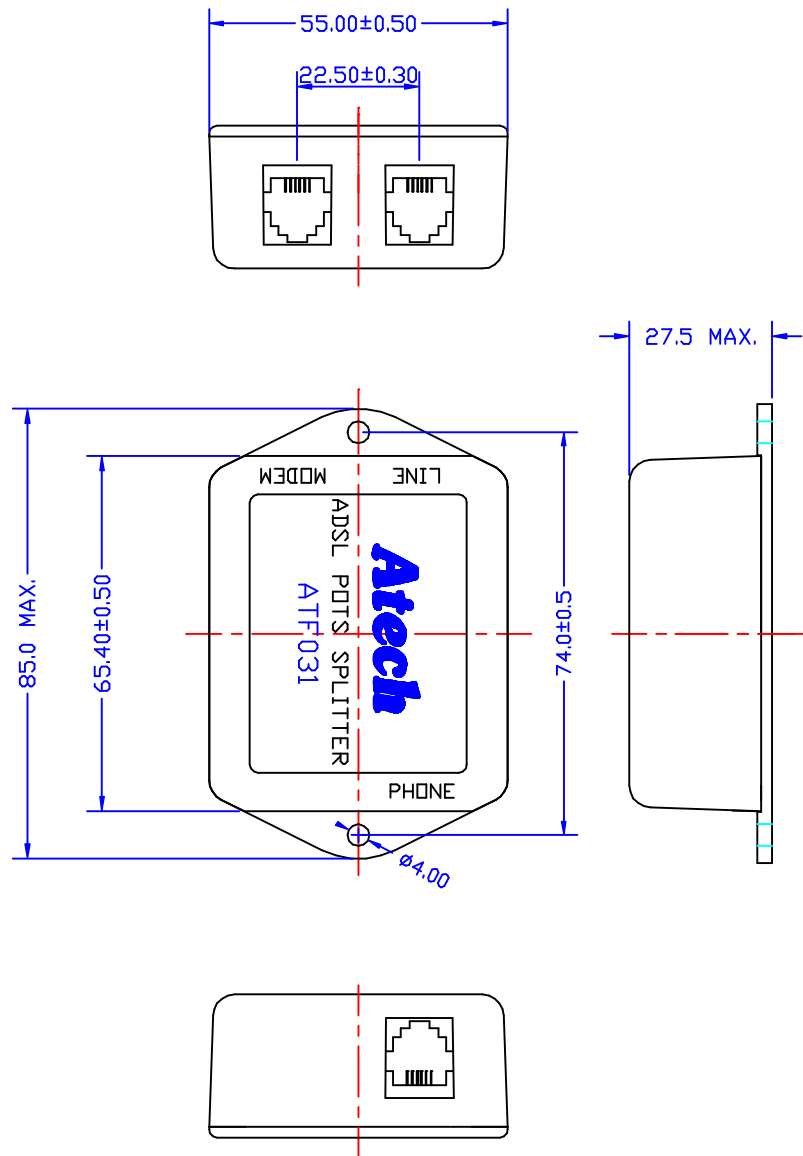


ELECTRICAL CHARACTERISTICS :

1. MEET ANNEX E OF ITU-T REC.G.992.1
2. DCR EACH LINE : 12.5 OHM MAX.
3. POTS 3dB CUTOFF FREQUENCY : 3.5 KHZ TYP.
4. INSERTION LOSS (@1KHZ) : 0.5 dB MAX.
5. ATTENUATION (@8KHZ) : 8 dB TYP.
(@20KHZ&ABOVE) : 60 dB TYP.
6. RETURN LOSS (@1KHZ) : 20 dB MIN.
7. LONGITUDINAL BALANCE (@200~4KHZ) : 53 dB MIN.
8. COMMON MODE REJECTION (@40KHZ) : 55 dB MIN.
(@1.1MHZ) : 25 dB MIN.
9. DELAY DISTORTION (@200~4KHZ) : 150u SEC MAX.
10. POTS LOOP CURRENTS : 120 mA
11. POTS TIP TO RING DC VOLTAGE 0-200V
12. POTS RINGING SIGNAL FROM 15.3HZ TO 68HZ : 150 Vrms

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-8667 FAX:(02)2794-8004	TITLE ADSL POTS SPLITTER	
							DWG. NO. ATF031	
	RELEASE	11/19/2001	PAIR	JEFF	SUEDY		UNITS: M/M	SAFETY
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 11/19/01	SHEET 1 OF 1	
REVISIONS							DRAW <i>Pair</i>	