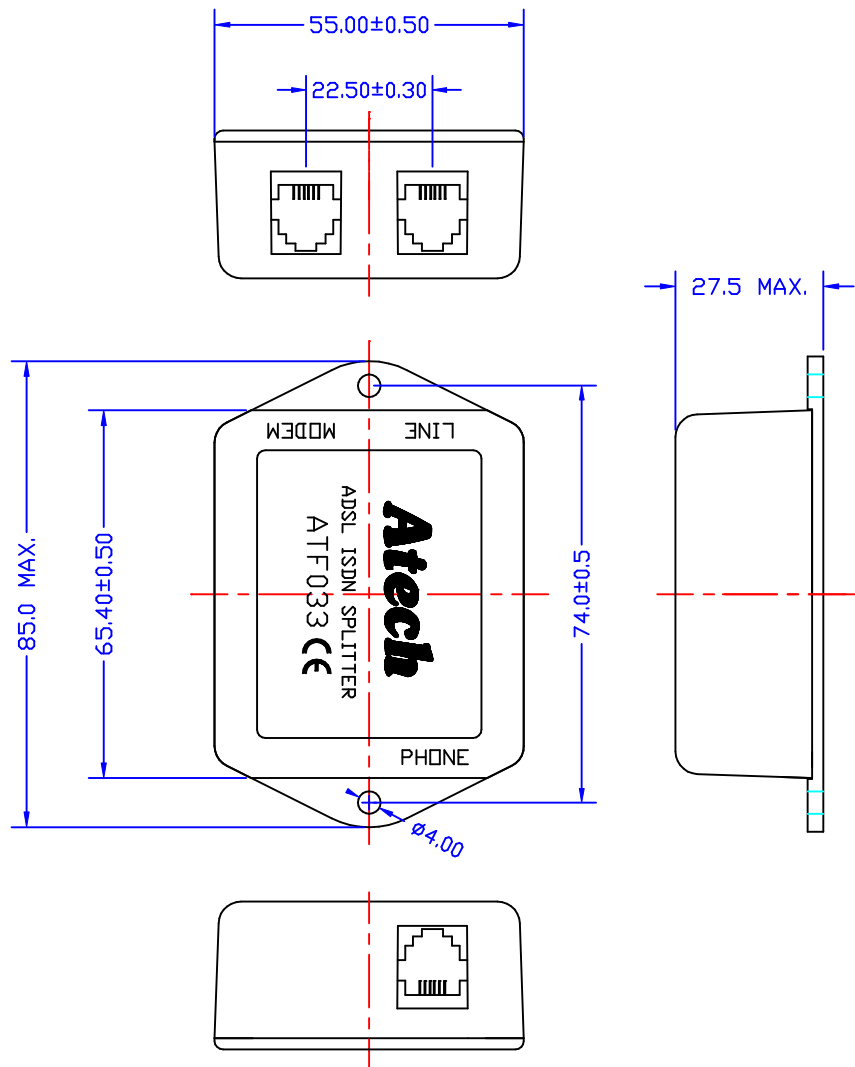


ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 12.5 OHM MAX.
2. TIP TO RING DC VOLTAGE : 0-72V
3. LINE CURRENT : 0-100mA
4. ISDN SPLITTER BANDWIDTH : DC TO 80KHZ
5. ISDN PORT IMPEDANCE : 135 OHM
6. INSERTION LOSS (@200HZ~80KHZ) : 2dB MAX.
7. ATTENUATION :
 - (@160KHZ~1104KHZ) : 60dB MIN.
 - (@1.1MHZ~2.2MHZ) : 55dB MIN.
8. DELAY DISTORTION (@100HZ~80KHZ) : 200uSEC MAX.
9. RETURN LOSS (@1KHZ~60KHZ) : 16dB MIN.
- (@60KHZ~80KHZ) : 10dB MIN.

E	ADD CE MARK	01/13 /2006	BART	AL	SUEDY	Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE	ADSL ISDN SPLITTER
D	ATTENUATION	11/14 /2005	BART	LYS	SUEDY		DWG. NO.	ATF033
C	Z= 135 OHM	03/04 /2003	PAIR	AL	SUEDY			
	RELEASE	07/29 /2002	DOLLY	JEFF	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW
REVISIONS						DATE		Pair
						07/29/02		