



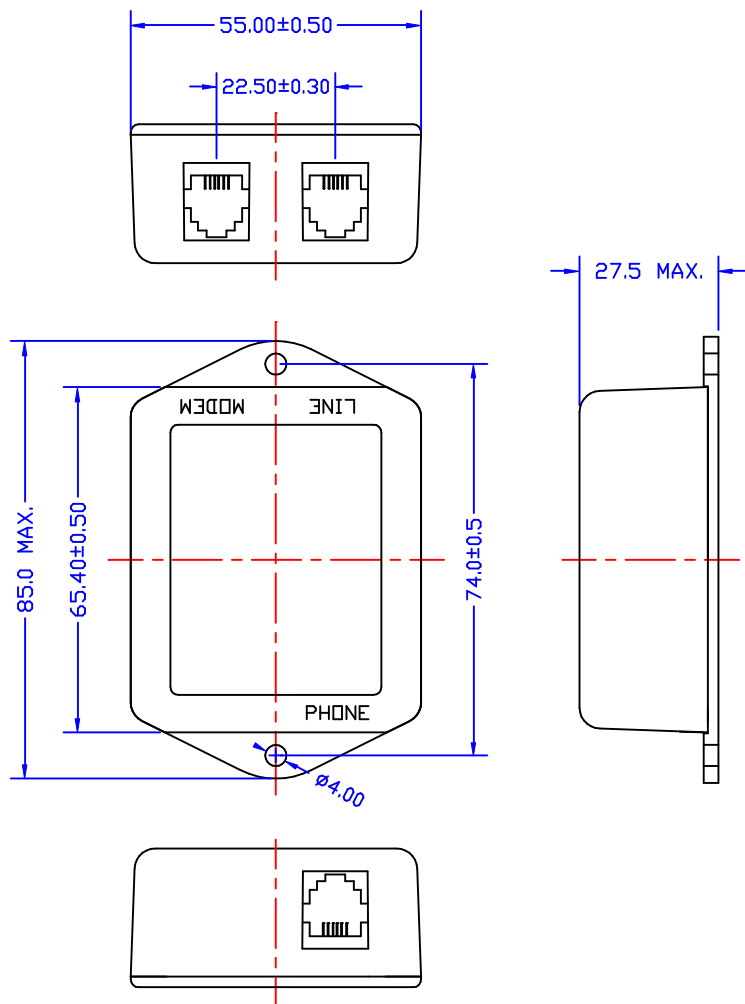

ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 12.5 OHM MAX.
2. TIP TO RING DC VOLTAGE : 0-72V
3. LINE CURRENT : 0-100mA
4. ISDN SPLITTER BANDWIDTH : DC TO 80KHZ
5. ISDN PORT IMPEDANCE : 135 OHM
6. INSERTION LOSS (@200KHZ~80KHZ) : 2dB MAX.
7. ATTENUATION (@160KHZ~1104KHZ) : 60dB MIN.
8. DELAY DISTORTION (@100HZ~80KHZ) : 200uSEC MAX.
9. RETURN LOSS (@1KHZ~60KHZ) : 16dB MIN.
(@60KHZ~80KHZ) : 10dB MIN.

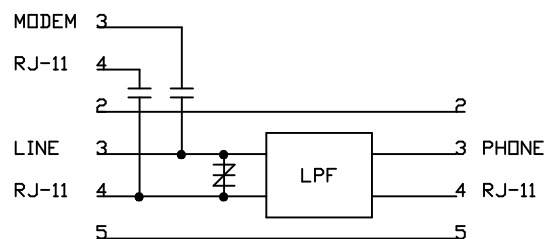

					Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE ADSL ISDN SPLITTER	
							DWG. NO. ATF033B	
A	Z = 135 OHM	03/04 2003	PAIR	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	11/25 2002	DOLLY	SIMON	SUEDY			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						11/25/02		