
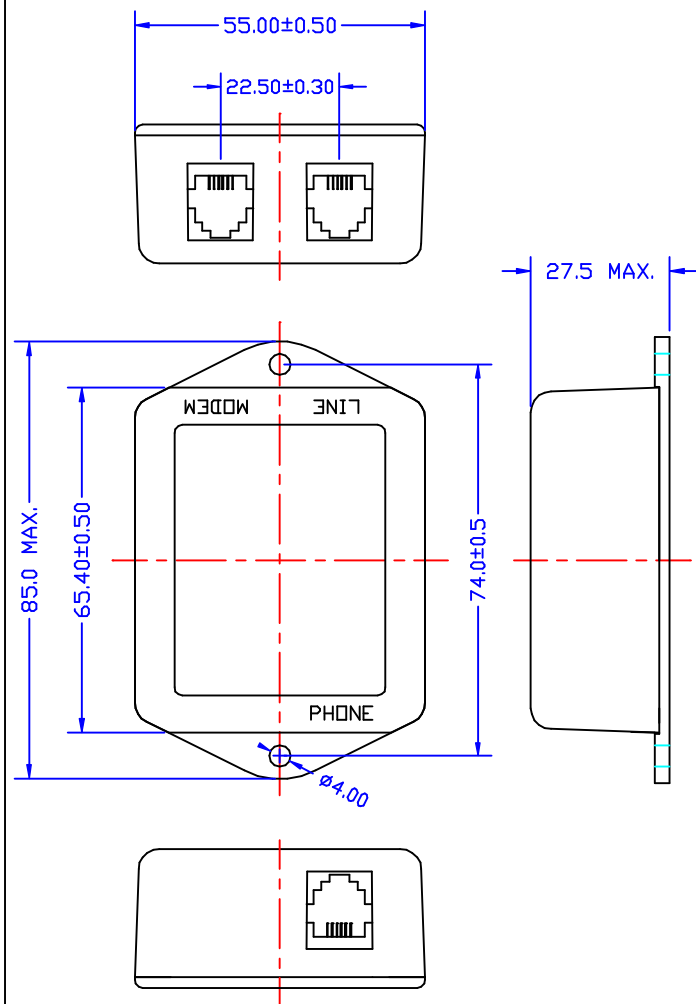


ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 12.5 OHM MAX.
2. TIP TO RING DC VOLTAGE : 0-72V
3. LINE CURRENT : 0-100mA
4. ISDN SPLITTER BANDWIDTH : DC TO 80KHZ
5. ISDN PORT IMPEDANCE : 150 OHM
6. INSERTION LOSS (@200HZ~80KHZ) : 2dB MAX.
7. ATTENUATION (@160KHZ~1104KHZ) : 60dB MIN.
8. DELAY DISTORTION (@100HZ~80KHZ) : 200uSEC MAX.
9. RETURN LOSS (@1KHZ~60KHZ) : 16dB MIN.
(@60KHZ~80KHZ) : 10dB MIN.

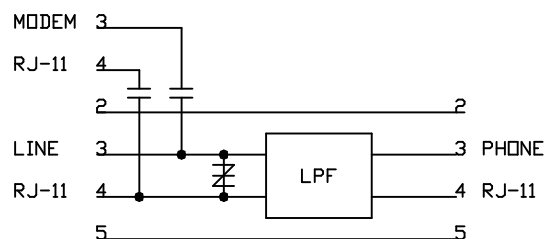

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004	TITLE	ADSL ISDN SPLITTER
							DWG. NO.	ATF033B
A	DIM	12/04/2002	DOLLY	PAIR	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	11/25/2002	DOLLY	SIMON	SUEDY	M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						11/25/02	DRAW	Pair