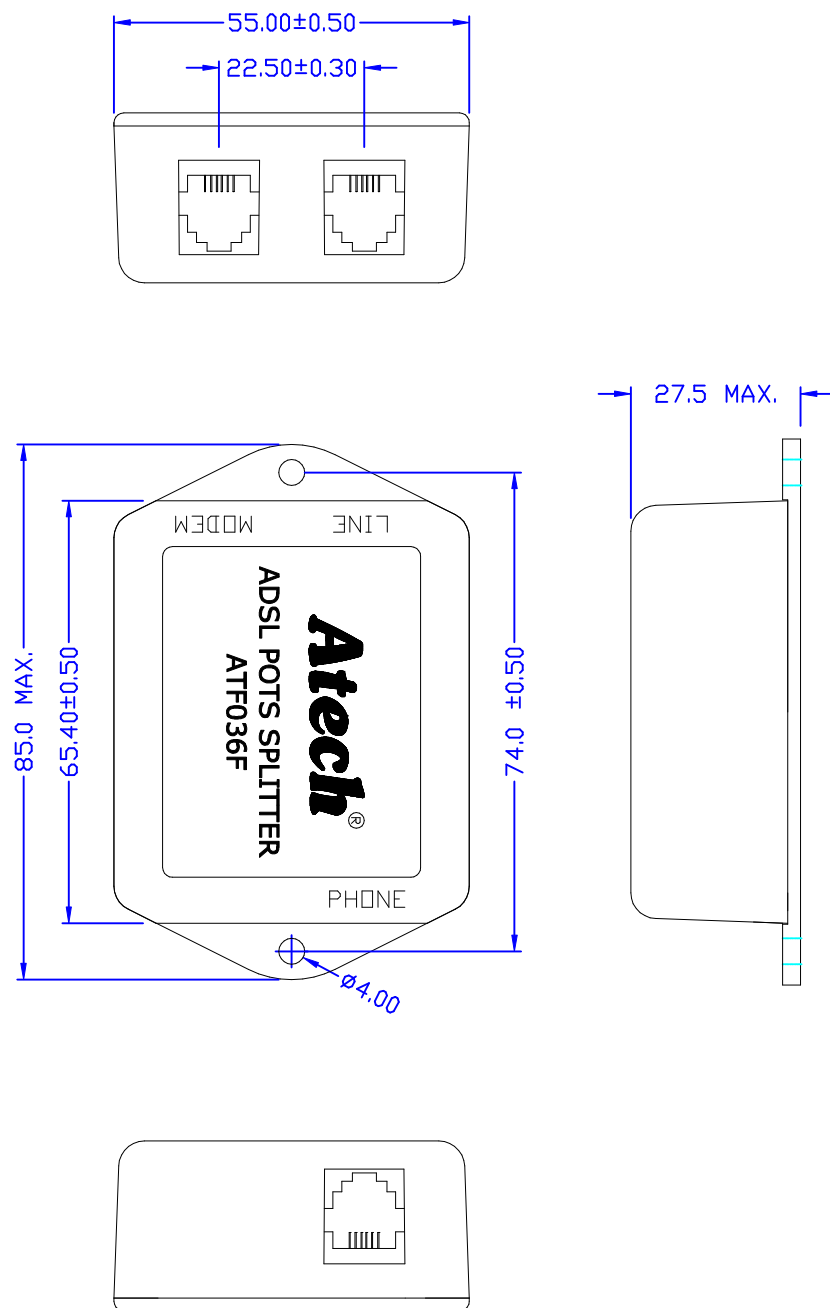


ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 12.5 OHM MAX.
2. INSERTION LOSS : @1KHZ = 0.3dB MAX.
3. INSERTION LOSS DISTORTION : @200HZ-4KHZ = ± 1 dB
4. RETURN LOSS : @300HZ = 14dB MIN.
@500HZ = 18dB MIN.
@2KHZ-3.4KHZ = 14dB MIN.
5. LONGITUDINAL BALANCE : @15HZ = 40dB MIN.
@50HZ = 46dB MIN.
@600HZ-3.4KHZ = 52dB MIN.
6. ATTENUATION : @30KHZ-1.1MHZ = 65dB MIN.
@1.1MHZ-2.2MHZ = 55dB MIN.

						Atech®		TITLE ADSL POTS SPLITTER	
B	ADD ®	12/01/2005	BART	AL	SUEDY	Atech Technology Co., Ltd.		DWG. NO.	
A	ATTENUATION	11/14/2005	BART	LYS	SUEDY	TEL:022794-6667 FAX:022794-8004		ATF036F	
	RELEASE	02/10/2003	DOLLY	SIMON	SUEDY	UNITS:		SAFETY	
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M		SHEET 1 OF 1	
REVISIONS						DATE		DRAW	
						02/10/03		Pair	