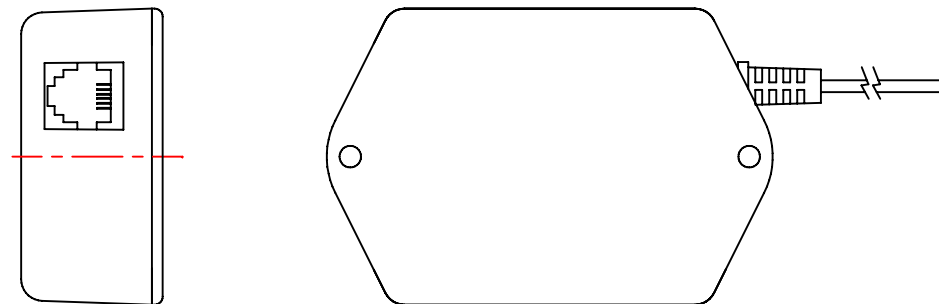
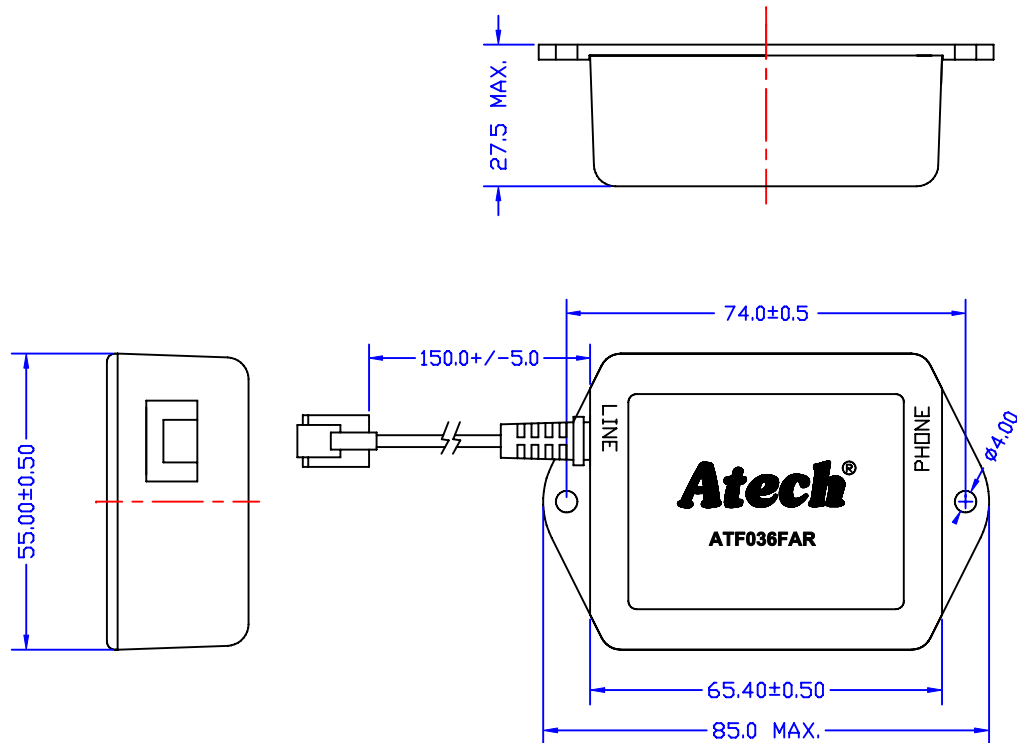


ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 12.5 OHM MAX.
2. INSERTION LOSS : @1KHZ = 0.3dB MAX.
3. INSERTION LOSS DISTORTION : @200HZ-4KHZ = ± 1 dB
4. RETURN LOSS : @300HZ = 14dB MIN.
@500HZ = 18dB MIN.
@2KHZ-3.4KHZ = 14dB MIN.
5. LONGITUDINAL BALANCE : @15HZ = 40dB MIN.
@50HZ = 46dB MIN.
@600HZ-3.4KHZ = 52dB MIN.
6. ATTENUATION : @30KHZ-1.1MHZ = 65dB MIN.
@1.1MHZ-2.2MHZ = 55dB MIN.
7. RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE	
								FILTER	
								DWG. NO.	
								ATF036FAR	
	RELEASE	08/14 2007	PAIR	ANGEL	EUGENE	UNITS:		SAFETY	
						M/M			
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET OF	
REVISIONS						08/14/07		DRAW	
								Pair	