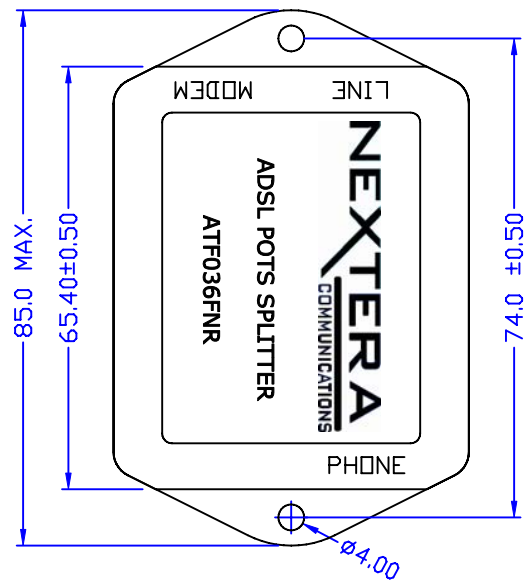
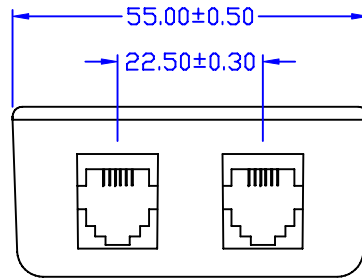


ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 12.5 OHM MAX.
2. INSERTION LOSS : @1KHZ = 0.3dB MAX.
3. INSERTION LOSS DISTORTION : @200HZ-4KHZ = ± 1 dB
4. RETURN LOSS : @300HZ = 14dB MIN.
@500HZ = 18dB MIN.
@2KHZ-3.4KHZ = 14dB MIN.
5. LONGITUDINAL BALANCE : @15HZ = 40dB MIN.
@50HZ = 46dB MIN.
@600HZ-3.4KHZ = 52dB MIN.
6. ATTENUATION : @30KHZ-1.1MHZ = 65dB MIN.
@1.1MHZ-2.2MHZ = 55dB MIN.
7. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL 022794-6667 FAX 022794-8004	TITLE	ADSL POTS SPLITTER
A	LOGO	04/26/2007	PAIR	MICHAEL	EUGENE		DWG. NO.	ATF036FNR
	RELEASE	03/30/2007	PAIR	MICHAEL	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						03/30/07	CSA06000ZA	<i>Pair</i>