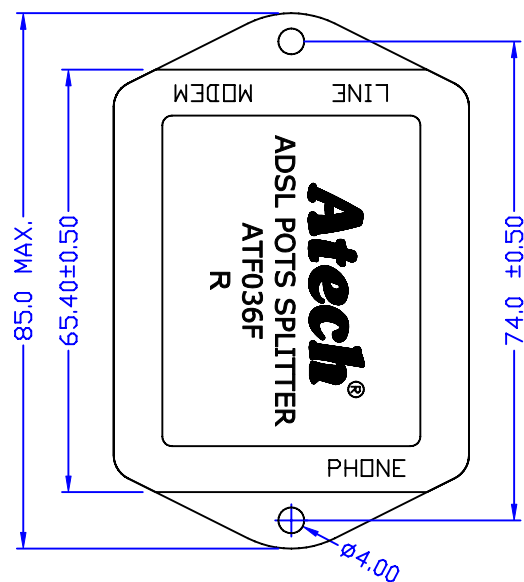
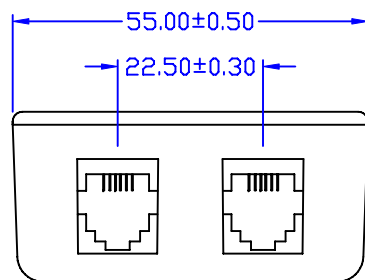


ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 12.5 OHM MAX.
2. INSERTION LOSS : @1KHZ = 0.3dB MAX.
3. INSERTION LOSS DISTORTION : @200HZ-4KHZ = ± 1 dB
4. RETURN LOSS : @300HZ = 14dB MIN.
@500HZ = 18dB MIN.
@2KHZ-3.4KHZ = 14dB MIN.
5. LONGITUDINAL BALANCE : @15HZ = 40dB MIN.
@50HZ = 46dB MIN.
@600HZ-3.4KHZ = 52dB MIN.
6. ATTENUATION : @30KHZ-1.1MHZ = 65dB MIN.
@1.1MHZ-2.2MHZ = 55dB MIN.
7. RoHS COMPLIANCE

						Atech®		TITLE	ADSL POTS SPLITTER
						Atech Technology Co. Ltd.		DWG. NO.	ATF036FR
						TEL:0212794-6667 FAX:0212794-8004			
A	MARKING	ADD R	07/28/2006	PAIR	AL	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE		03/23/2006	PAIR	EUGENE	SUEDY	M/M		
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:		DRAW
REVISIONS						03/23/06	CSA06000KA		Pair