
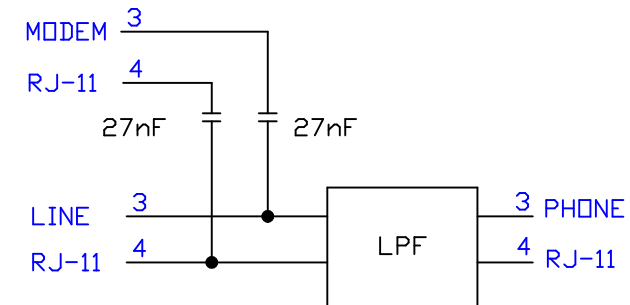


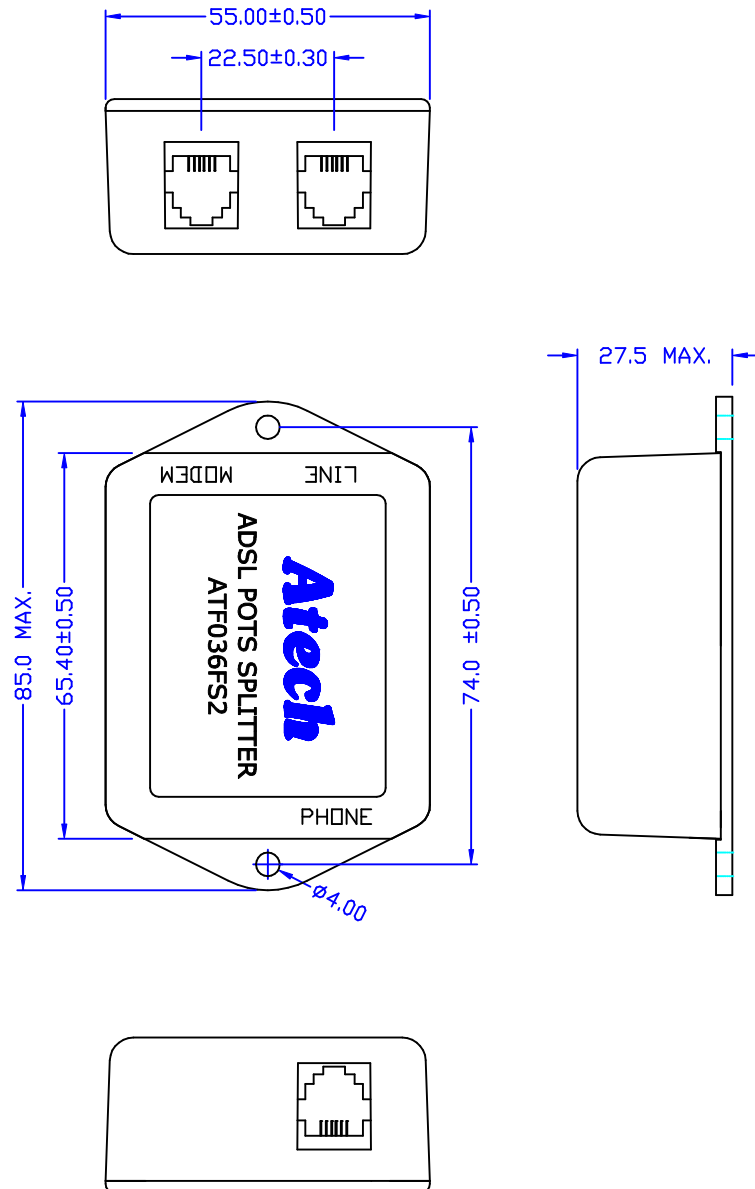

## ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 12.5 OHM MAX.
2. INSERTION LOSS : @1KHZ = 0.3dB MAX.
3. INSERTION LOSS DISTORTION : @200HZ-4KHZ =  $\pm 1$ dB
4. RETURN LOSS : @300HZ = 14dB MIN.  
@500HZ = 18dB MIN.  
@2KHZ-3.4KHZ = 14dB MIN.
5. LONGITUDINAL BALANCE : @15HZ = 40dB MIN.  
@50HZ = 46dB MIN.  
@600HZ-3.4KHZ = 52dB MIN.
6. ATTENUATION : @30KHZ-1.1MHZ = 65dB MIN.

|           |             |            |      |         |       |                                                                                |  |                             |                     |
|-----------|-------------|------------|------|---------|-------|--------------------------------------------------------------------------------|--|-----------------------------|---------------------|
|           |             |            |      |         |       | <b>Atech®</b><br>Atech Technology Co., Ltd.<br>TEL:022794-6667 FAX:022794-8004 |  | TITLE ADSL POTS<br>SPLITTER |                     |
|           |             |            |      |         |       |                                                                                |  | DWG. NO.<br>ATF036FS2       |                     |
|           | RELEASE     | 11/03/2004 | BART | MICHAEL | SUEDY | UNITS:<br>M/M                                                                  |  | SAFETY                      | SHEET 1 OF 1        |
| NO.       | DESCRIPTION | DATE       | BY   | CHK     | APPD  | DATE<br>11/03/04                                                               |  |                             | DRAW<br><i>Pair</i> |
| REVISIONS |             |            |      |         |       |                                                                                |  |                             |                     |