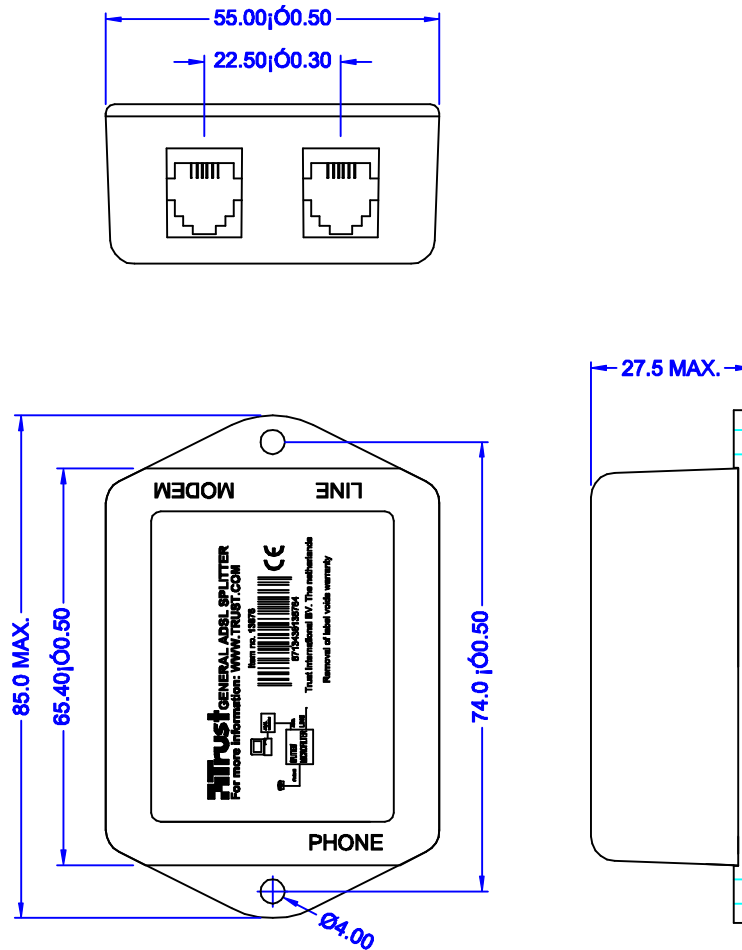


ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 12.5 OHM MAX.
2. INSERTION LOSS : @1KHZ = 0.3dB MAX.
3. INSERTION LOSS DISTORTION : @200HZ-4KHZ = ± 1 dB
4. RETURN LOSS : @300HZ = 14dB MIN.
@500HZ = 18dB MIN.
@2KHZ-3.4KHZ = 14dB MIN.
5. LONGITUDINAL BALANCE : @15HZ = 40dB MIN.
@50HZ = 46dB MIN.
@600HZ-3.4KHZ = 52dB MIN.
6. ATTENUATION : @30KHZ-1.1MHZ = 65dB MIN.

					Atech® Atech Technology Co., Ltd. TEL: 022794-8887 FAX: 022794-8804		TITLE ADSL POTS SPLITTER		
B	MARKING	09/22/2003	RORY	AL			SUEDY	DWG. NO. ATF036FT	
A	MARKING	08/02/2003	PAIR	AL			SUEDY		
	RELEASE	03/29/2003	PAIR	SIMON	SUEDY	UNITS: M/M	SAFETY		
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 03/29/03	SHEET 10F 1		
REVISIONS						DRAW Pair			