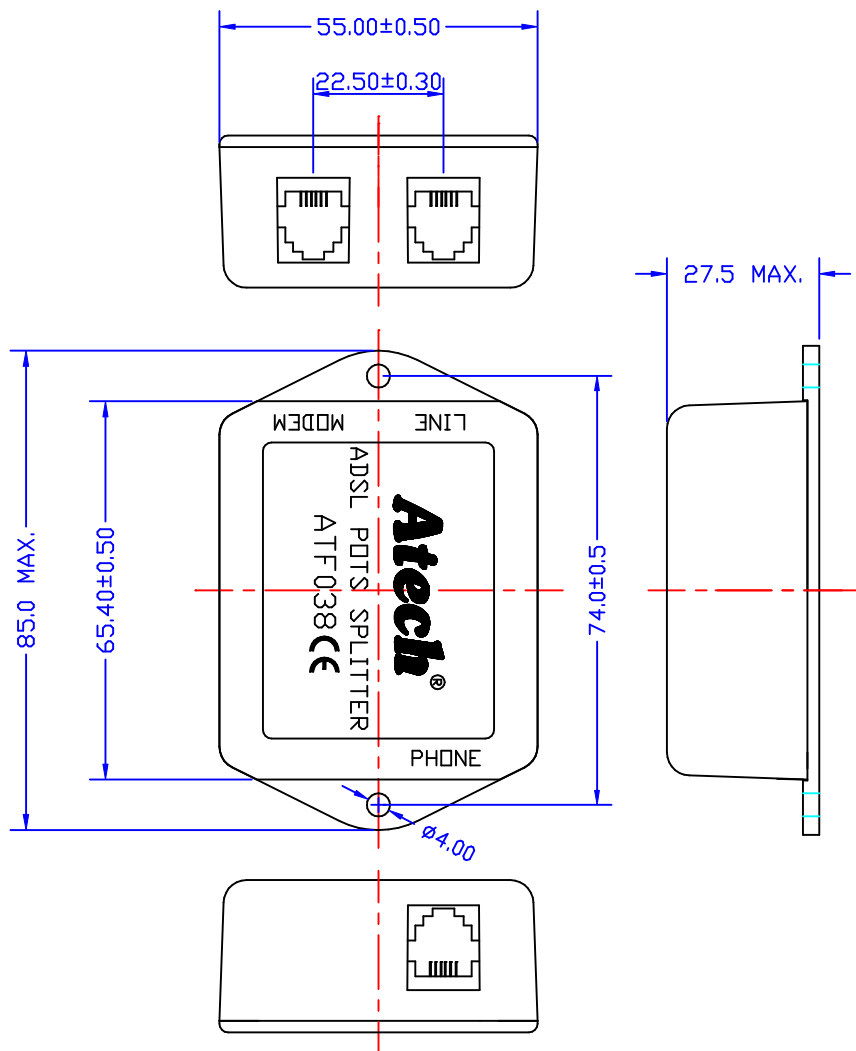


ELECTRICAL CHARACTERISTICS : (MEET ITU G.992-1 ANNEX E)

- POTS LOOP CURRENT : 100mA
- DCR : TOTAL = 50 OHM MAX.
- INSERTION LOSS (@1KHZ) : 0.3dB MAX.
- INSERTION LOSS DISTORTION (@200HZ~4KHZ) : $\pm 1\text{dB}$
- RETURN LOSS (@200HZ~500HZ) : 14dB MIN.
(@500HZ~2KHZ) : 18dB MIN.
(@2KHZ~3.4KHZ) : 14dB MIN.
- FREQUENCY PULSE METERING I/L (@12KHZ / 16KHZ) : 3dB MAX.
- LONGITUDINAL BALANCE (@15HZ~50HZ) : 40dB MIN.
(@50HZ~600HZ) : 46dB MIN.
(@600HZ~3.4KHZ) : 52dB MIN.
- DELAY (@0.2KHZ~4KHZ) : 250uSEC MAX.
- ADSL BAND ATTENUATION (@32KHZ~1.1MHZ) : 55dB MIN.
- ISOLATION RESISTANCE (@T-R) : 1M OHM MIN.
(@T-G, R-G) : 10M OHM MIN.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ADSL POTS SPLITTER	
B	ADD @	12/01/2005	BART	AL	SUEDY		DWG. NO. ATF038	
A	ADD CE	07/14/2005	BART	AL	SUEDY			
	RELEASE	10/19/2001	DOLLY	JEFF	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 10/19/01		DRAW <i>Pair</i>
REVISIONS								