



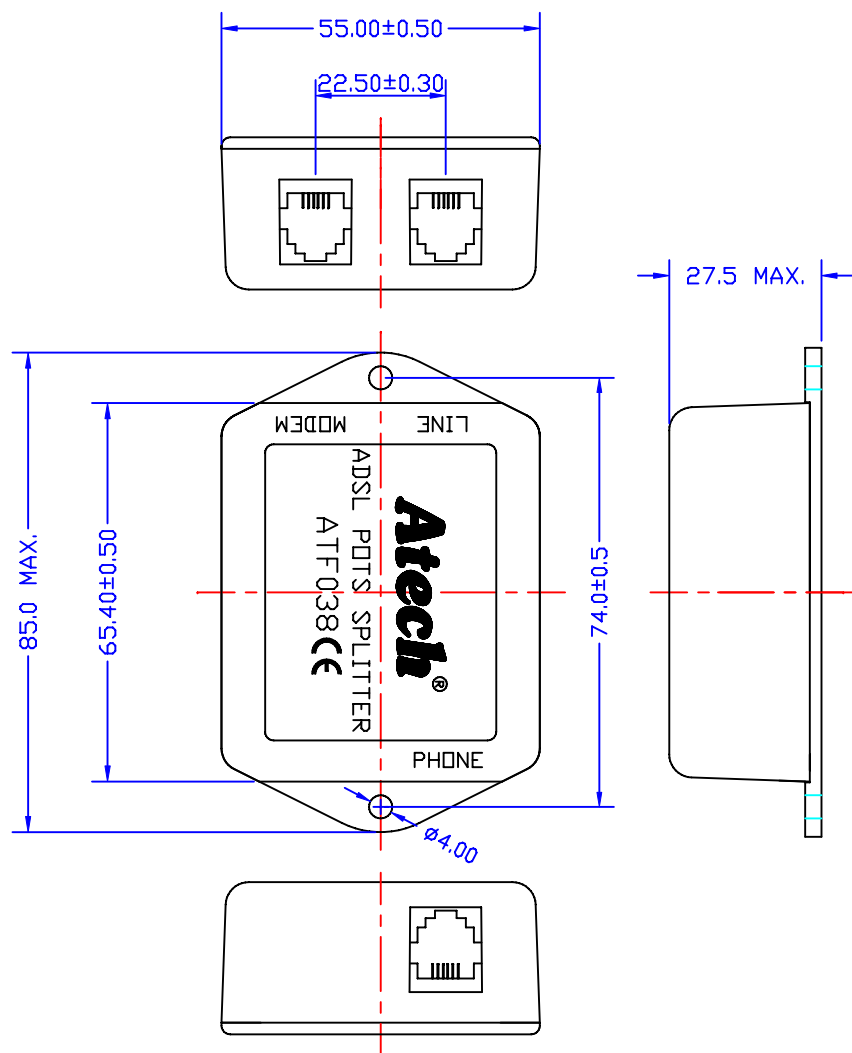

ELECTRICAL CHARACTERISTICS : (MEET ITU G.992-1 ANNEX E)

1. POTS LOOP CURRENT : 100mA
2. DCR : TOTAL = 50 OHM MAX.
3. INSERTION LOSS (@1KHZ) : 0.3dB MAX.
4. INSERTION LOSS DISTORTION (@200HZ~4KHZ) : ± 1 dB
5. RETURN LOSS (@200HZ~500HZ) : 14dB MIN.
(@500HZ~2KHZ) : 18dB MIN.
(@2KHZ~3.4KHZ) : 14dB MIN.
6. FREQUENCY PULSE METERING I/L (@12KHZ / 16KHZ) : 3dB MAX.
7. LONGITUDINAL BALANCE (@15HZ~50HZ) : 40dB MIN.
(@50HZ~600HZ) : 46dB MIN.
(@600HZ~3.4KHZ) : 52dB MIN.
8. DELAY (@0.2KHZ~4KHZ) : 250uSEC MAX.
9. ADSL BAND ATTENUATION (@32KHZ~1.1MHZ) : 55dB MIN.
10. ISOLATION RESISTANCE (@T-R) : 1M OHM MIN.
(@T-G, R-G) : 10M OHM MIN.
11. RoHS COMPLIANCE

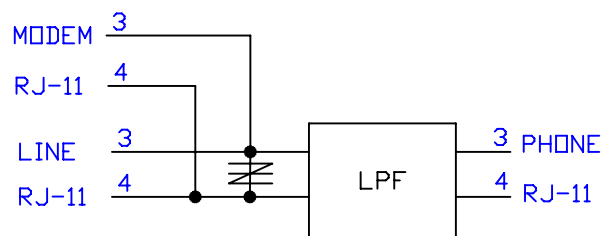

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6867 FAX:(02)2794-8004	TITLE ADSL POTS SPLITTER	
							DWG. NO. ATF038R	
A	TITLE	01/09 /2006	PAIR	MICHAEL	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	04/07 /2006	PAIR	MIC	EUGENE			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						04/07/06	CSA06000YA	<i>Pair</i>