



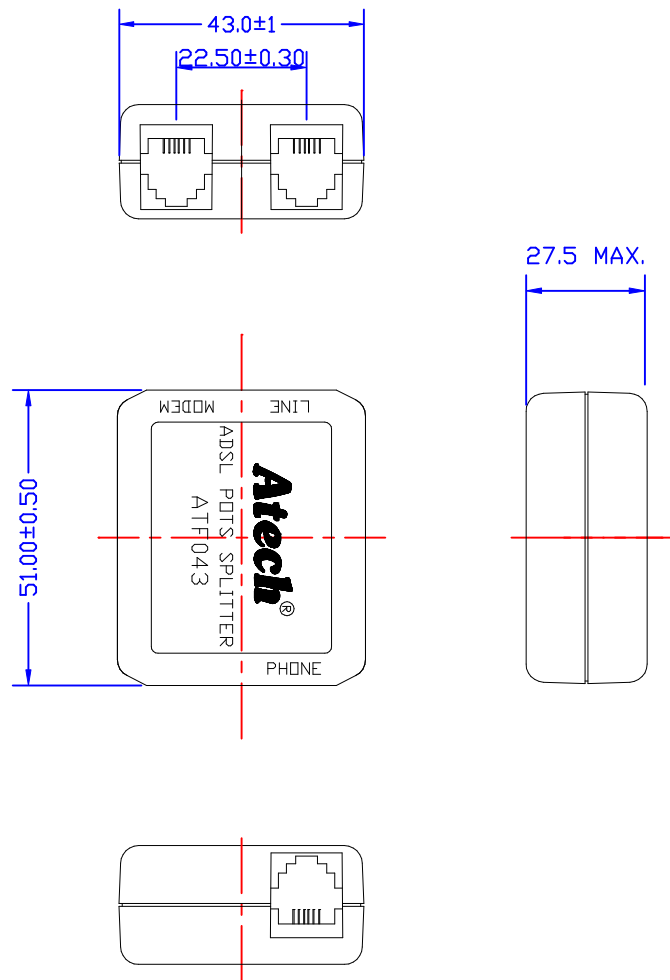

ELECTRICAL CHARACTERISTICS :

1. MEET ANNEX E OF ITU-T REC.G.992.1
2. DCR EACH LINE : 20 OHM MAX.
3. POTS 3dB CUTOFF FREQUENCY : 3.5 KHZ TYP.
4. INSERTION LOSS (@1KHZ) : 0.5 dB MAX.
5. ATTENUATION (@20KHZ&ABOVE) : 60 dB TYP.
6. RETURN LOSS (@1KHZ) : 12 dB MIN.
7. LONGITUDINAL BALANCE (@200~4KHZ) : 53 dB MIN.
8. COMMON MODE REJECTION (@40KHZ) : 55 dB MIN.
(@1.1MHZ) : 25 dB MIN.
9. DELAY DISTORTION (@200~4KHZ) : 150u SEC MAX.
10. POTS LOOP CURRENTS : 120 mA
11. POTS TIP TO RING DC VOLTAGE 0-200V
12. POTS RINGING SIGNAL FROM 15.3HZ TO 68HZ : 150 Vrms

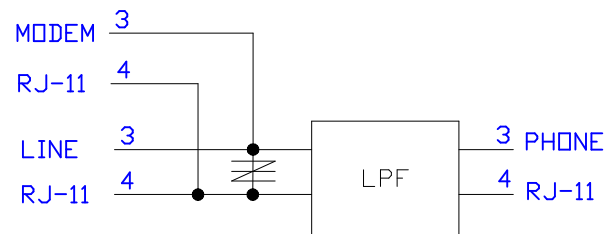

C	ADD @	12/01/2005	BART	AL	SUEDY	Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004	TITLE	ADSL POTS SPLITTER
B	43.0±1.0	03/25/2003	PAIR	AL	SUEDY		DWG. NO.	ATF043
A	SPEC.	01/13/2003	DOLLY	AL	SUEDY			
	RELEASE	02/07/2002	PAIR		SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE		DRAW
						02/07/02		Pair