

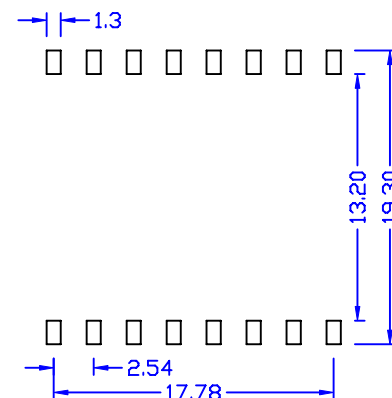
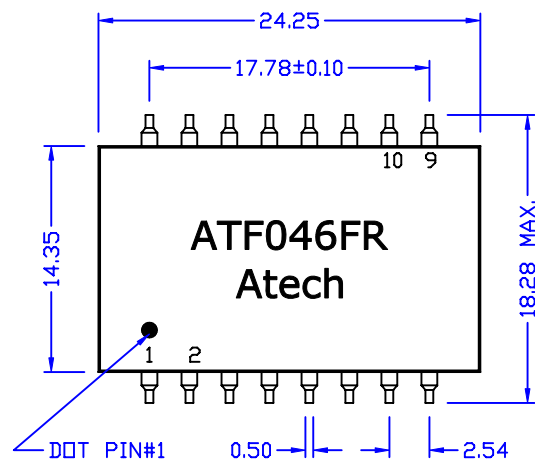


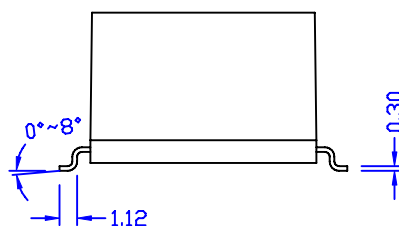

SUGGESTED PAD LAYOUT

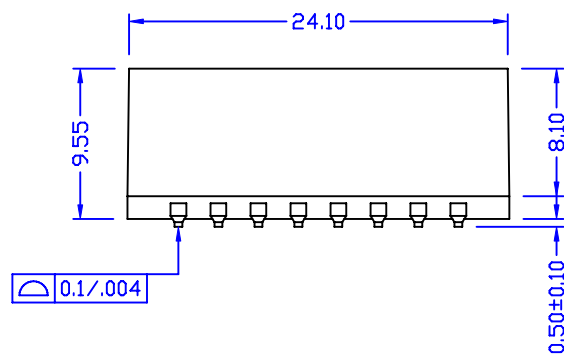

ELECTRICAL SPECIFICATIONS@25°C :

1. DESCRIPTION : ISDN SPLITTER LPF
2. INSERTION LOSS : 3dB MAX.
3. APPLICATION : SH/LH
4. PASSBAND FREQUENCY : DC-630KHZ
5. RETURN LOSS : 20dB MIN.
6. STOPBAND FREQUENCY : 1.1-7.9MHZ
7. ATTENUATION : 65dB MIN.
8. IMPEDANCE : 150 OHMS
9. RoHS COMPLIANT

						Atech®		TITLE VDSL FILTER SOLUTIONS	
						Atech Technology Co., Ltd.		DWG. NO. ATF046FR	
						TEL:0212794-6667 FAX:0212794-8004			
RELEASE		03/26/2007	PAIR	MICHAEL	EUGENE	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						03/26/07		DRAW Pair	