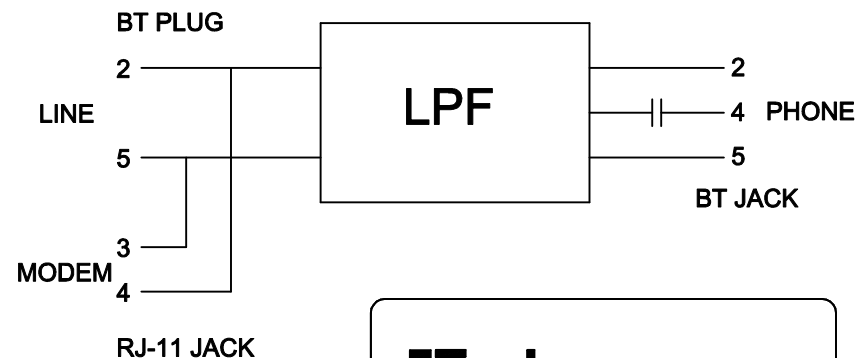
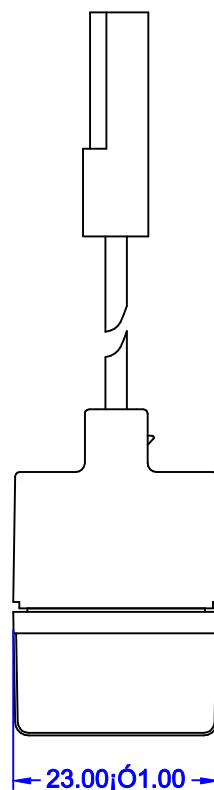
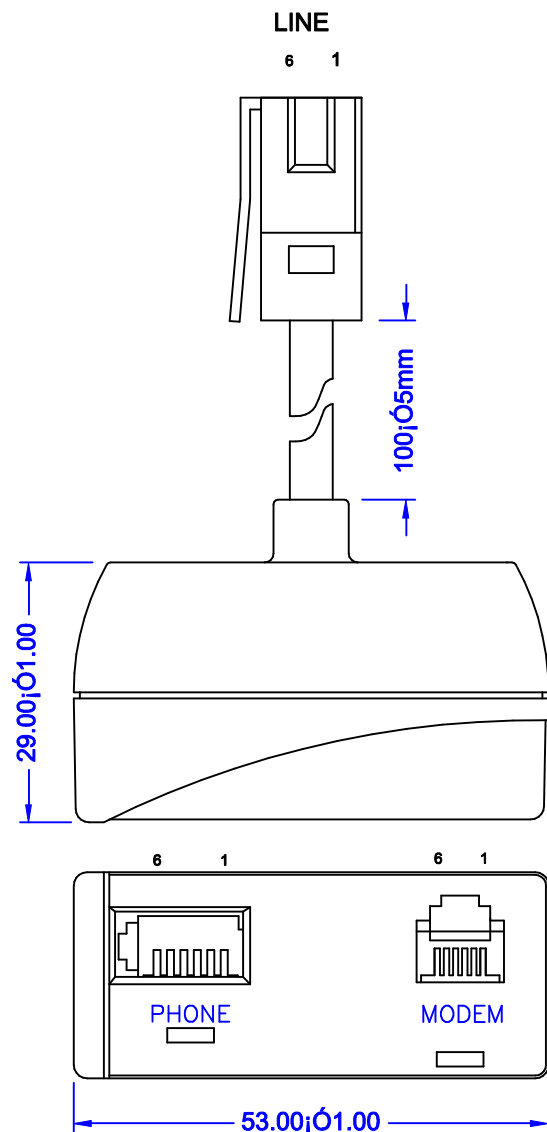


ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 50 OHM MAX.
2. INSERTION LOSS (@1KHZ, 1Vrms) : 1dB MAX.
3. INSERTION LOSS DISTORTION : (@200HZ-4KHZ) : ± 1 dB
4. RETURN LOSS : (@SRL-L) = 13dB MIN.
(@ERL) = 11dB MIN.
(@SRL-H) = 7dB MIN.
5. LONGITUDINAL BALANCE (@200HZ-3KHZ) : 54dB MIN.
6. ATTENUATION (@25KHZ) : 18dB MIN.
(@50KHZ) : 30dB MIN.
(@100KHZ) : 40dB MIN.

						Atech® Atech Technology Co., Ltd. TEL: (02)2794-8867 FAX: (02)2794-8004	TITLE MICRO FILTER FOR UK	
B	MARKING	09/22/2003	RORY	AL	SUEDY		DWG. NO. ATF047B1	
A	MARKING	09/03/2003	PAIR	AL	SUEDY			
	RELEASE	06/26/2003	RORY	AL	SUEDY	UNITS: M/M		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 06/26/03		DRAW Pair
REVISIONS								