
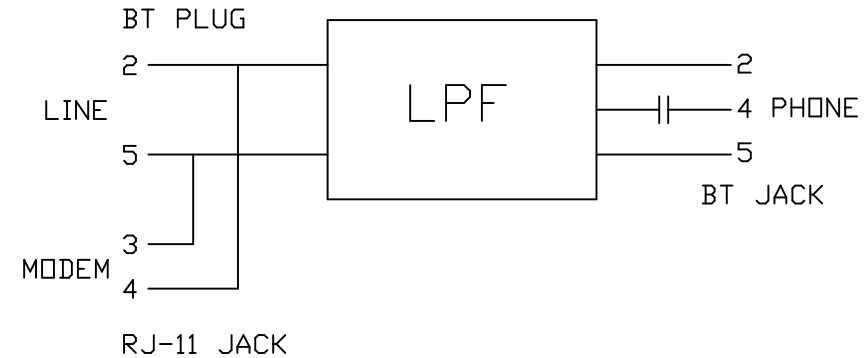
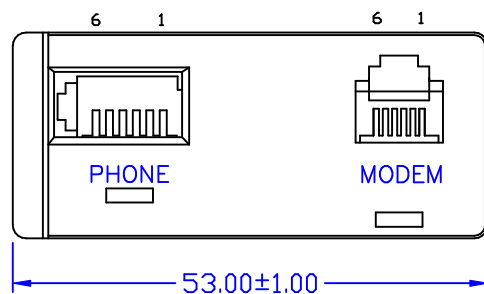


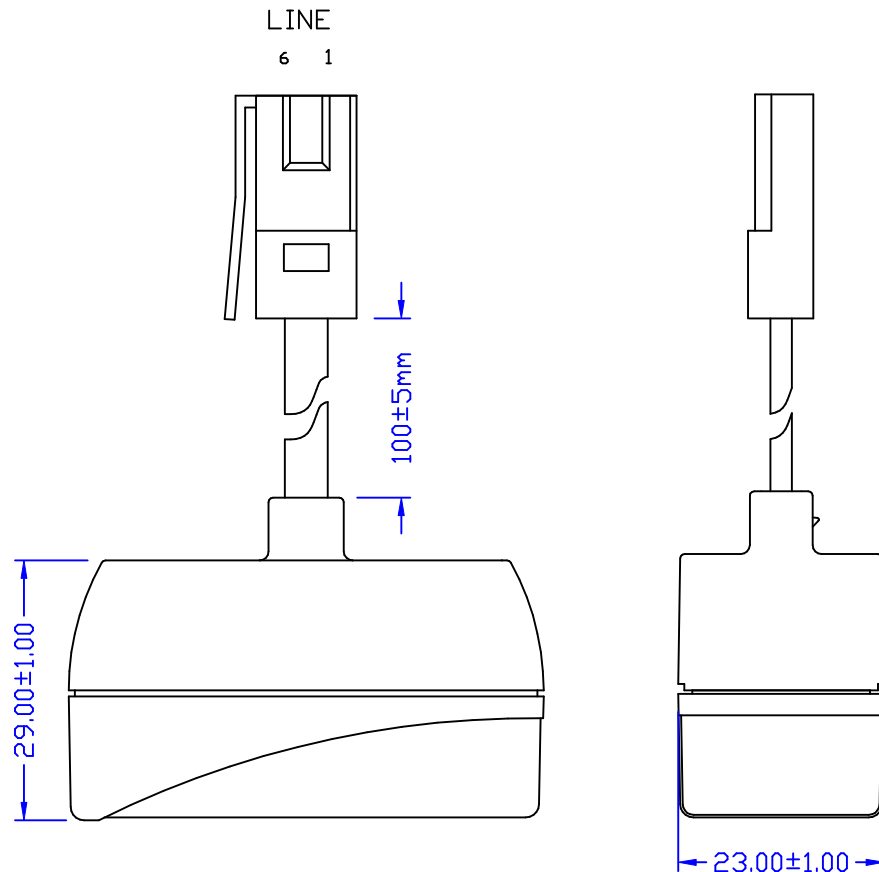

ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 50 OHM MAX.
2. INSERTION LOSS (@1KHZ, 1Vrms) : 1dB MAX.
3. INSERTION LOSS DISTORTION : (@200HZ-4KHZ) : $\pm 1 \text{ dB}$
4. RETURN LOSS : (@SRL-L) = 13dB MIN.
(@ERL) = 11dB MIN.
(@SRL-H) = 7dB MIN.
5. LONGITUDINAL BALANCE (@200HZ-3KHZ) : 54dB MIN.
6. ATTENUATION (@25KHZ) : 18dB MIN.
(@50KHZ) : 30dB MIN.
(@100KHZ) : 40dB MIN.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE MICRO FILTER FOR UK	
							DWG. NO.	ATF047B2
	RELEASE	04/12/2005	PAIR	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						04/12/05		