
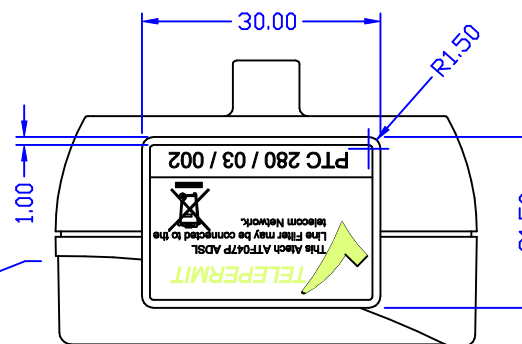
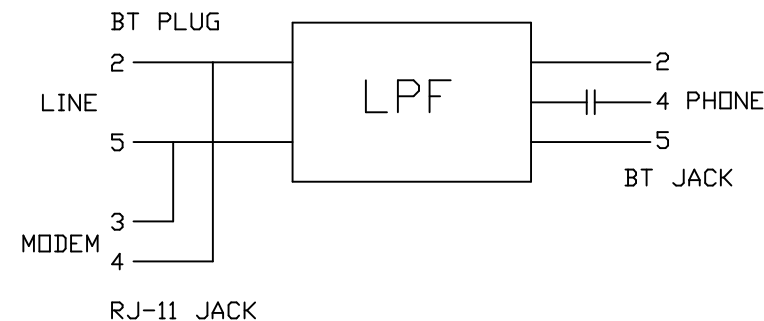
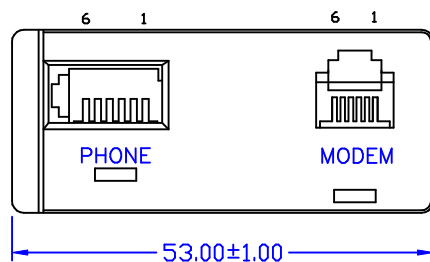
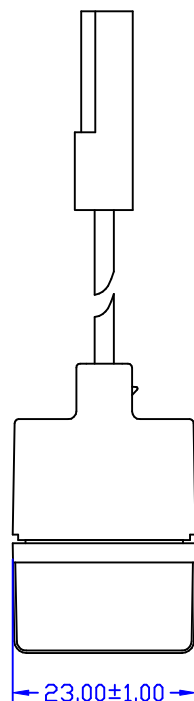


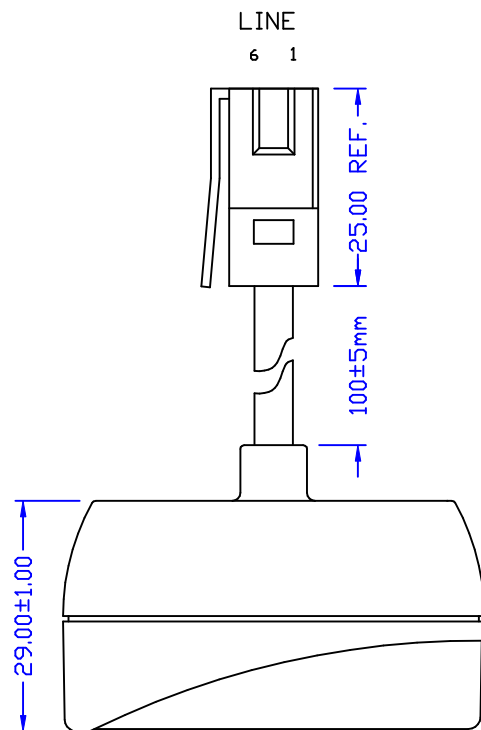

ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 50 OHM MAX.
2. INSERTION LOSS (@1KHZ, 1Vrms) : 1dB MAX.
3. INSERTION LOSS DISTORTION : (@200HZ-4KHZ) : ± 1 dB
4. RETURN LOSS (@REF ZBT3, 300HZ-3.4KHZ) : 12dB MIN.
(@REF ZN, 300HZ-3.4KHZ) : 12dB MIN.
5. LONGITUDINAL BALANCE (@200HZ-3KHZ) : 54dB MIN.
6. ATTENUATION (@25KHZ) : 18dB MIN.
(@50KHZ) : 30dB MIN.
(@100KHZ) : 40dB MIN.
7. ROHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE MICRO FILTER FOR UK	
								DWG. NO. ATF047PRW	
A	BLACK bar	02/07/2006	PAIR	AL	SUEDY				
	RELEASE	08/01/2005	PAIR	AL	SUEDY	UNITS: M/M		SAFETY	
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						08/01/05		DRAW Pair	