
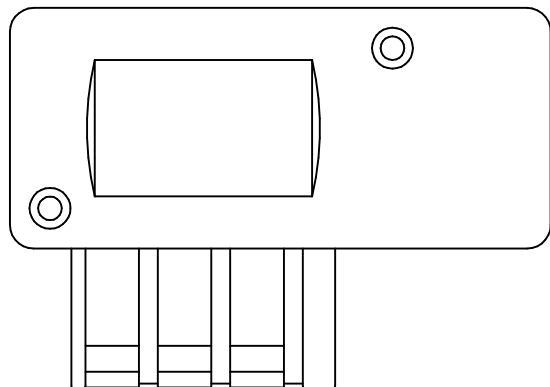
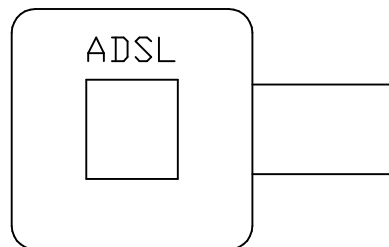
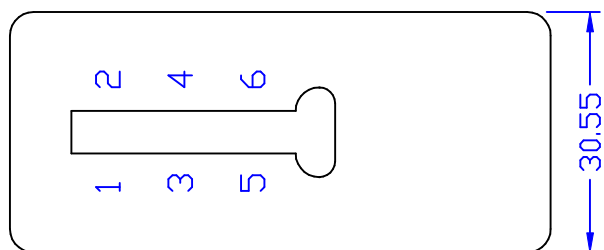
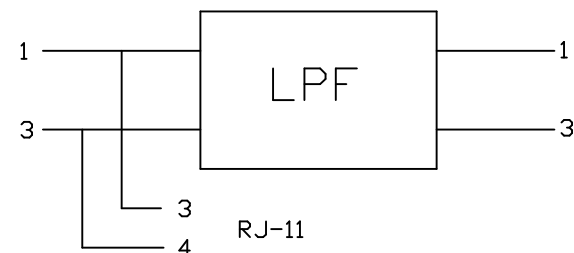
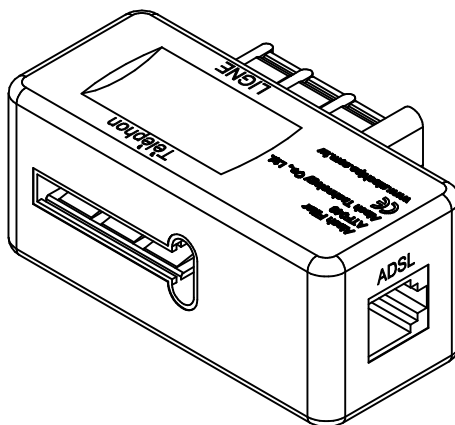


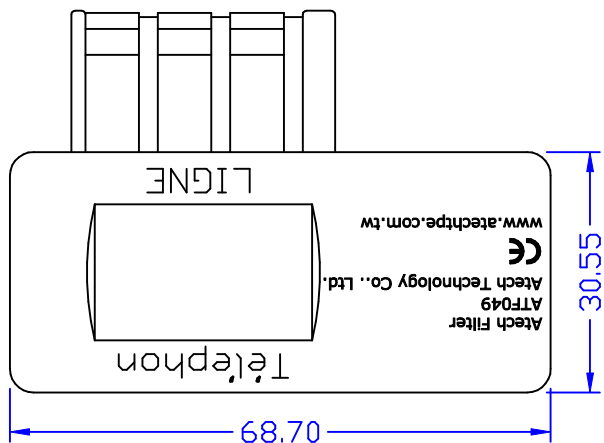

ELECTRICAL CHARACTERISTICS :

1. LINE IMPEDANCE : 600 OHM
2. DCR EACH LINE : 50 OHM MAX.
3. INSERTION LOSS (@1KHZ) : 1dB MAX.
4. INSERTION LOSS DISTORTION (@200HZ~4KHZ) : ± 1 dB
5. RETURN LOSS (@300HZ~500HZ) : 25dB MIN.
(@500HZ~2KHZ) : 25dB MIN.
(@2KHZ~3.4KHZ) : 24dB MIN.
6. DELAY DISTORTION (@200HZ~4KHZ) : 200uSEC MAX.
7. ATTENUATION (@32KHZ~60KHZ) : 15dB MIN.
(@60KHZ~1.1MHZ) : 25dB MIN.
8. ISOLATION RESISTANCE : 25M OHM MIN.

D	ADD SCHEMATIC	11/10 /2005	BART	AL	SUEDY	Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE	SPLITTER
C	MARKING	04/27 /2004	PAIR	AL	SUEDY		DWG. NO.	ATF049
B	MARKING	02/17 /2003	DOLLY	AL	SUEDY			
	RELEASE	07/03 /2002	DOLLY	JEFF	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
ND	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW
REVISIONS						DATE		Pair
						07/03/02		