

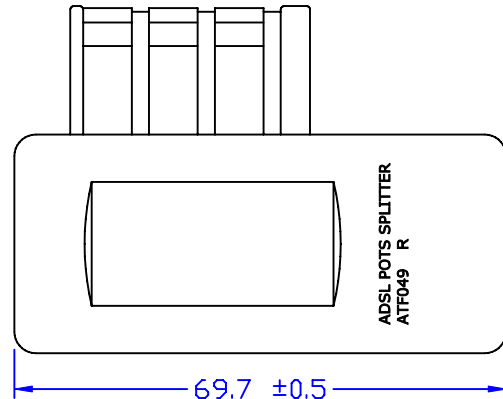


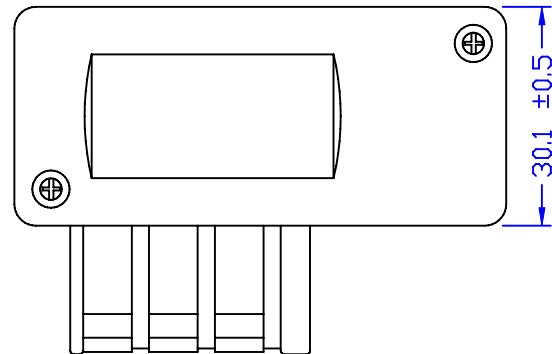

Connector	Function	Style	Tip	Ring
J1	Line	France	Pin2	Pin4
J2	Phone	France	Pin2	Pin4
J3	Modem	RJ11	Pin3	Pin4

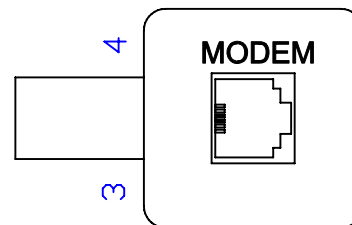

ELECTRICAL CHARACTERISTICS :

1. PDTS Port Impedance : 270 ohm + 150 nF // 750 ohm
2. Insertion Loss @1KHz : -1 dB Max.
3. Insertion distortion @200~4KHz : ± 1.1 dB
4. Attenuation @32~60KHz : -15 dB Min.
@60kHz~600KHz : -25 dB Min.
5. Longitudinal Balance @200Hz~3KHz : -53 dB Min.
6. PDTS Tip and Ring DC Voltage : 0~105 V
7. DC Resistance each line : 25 ohm Max.
8. Return Loss @300Hz~500Hz : -14 dB Min.
@500Hz~2KHz : -18 dB Min.
@2KHz~3.4KHz : -14 dB Min.
9. Isolation resistance tip/ring : 25 M ohm Min.
10. RoHS COMPLIANCE.

					 Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004	TITLE ADSSL POTS CPE SPLITTER		
B	MARKING	07/19/2006	PAIR	AL		EUGENG	DWG. NO.	
A	MARKING	12/28/2005	BART	MICHAEL		SUEDY	ATF049AR	
	RELEASE	12/01/2005	BART	MICHAEL		SUEDY	UNITS:	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK		APPD	M/M	
REVISIONS						DATE	SHEET 1 OF 1	
						12/01/05	DRAW <i>Pair</i>	